

SISPAD 2024

International Conference on Simulation of
Semiconductor Processes and Devices

Sep 24 - 27

Conference Program

San Jose



Welcome to SISPAD 2024

Dear Colleagues,

On behalf of the conference committee, it is our great pleasure to invite you to join the 2024 International Conference on Simulation of Semiconductor Processes and Devices (SISPAD), held in San Jose, California, on September 25-27, 2024. Since its inception in 1996, the conference has been recognized as a leading forum for the presentation and discussion of recent advances and developments in the field of semiconductor process, device, and circuit simulations, and their applications to advanced devices.

The 29th iteration of SISPAD has an outstanding program comprising of 14 sessions including 2 plenary talks, 6 invited talks, 47 contributed talks, and 20 poster presentations. The presented research encompasses a broad spectrum of semiconductor and advanced modeling topics, including but not limited to process/device modeling of established logic, memory and power devices, 2-D materials, ferroelectric modeling, sensors and optoelectronics, machine learning and AI-based modeling, chip-level and packaging modeling, and quantum computing.

A workshop program has been organized for September 24, 2024 and the themes this year are focused on "More-Moore" and "More-than-Moore". A total of 6 tutorial sessions will be provided by established and highly regarded experts in the field of semiconductor devices and technology.

This year's excellent technical program is the result of an exceptional effort by the members of the Technical Program Committee as well as the conference organizing committee led by Dr. Pratik B. Vyas. We would like to express our sincere appreciation to the authors for their high-quality contributions. We also wish to express our sincere gratitude to all the members of the steering committee for their invaluable guidance and supervision.

We sincerely hope that you enjoy the presentations and insightful discussions and find abundant opportunities to network with fellow colleagues and subject experts. With this, we extend a warm welcome to all the speakers and the attendees of SISPAD 2024.



**APPLIED
MATERIALS®**



SJSU SAN JOSÉ STATE
UNIVERSITY

El Mehdi Bazizi
General Chair

Hiu Yung Wong
Co-Chair/Technical Program Chair

International Conference on Simulation of Semiconductor Processes and Devices

September 25 – 27, 2024 – San José, California, United States of America

The conference will be held in presence at the The Westin San José located in 302 S Market St, San Jose, California, 95113 (<https://maps.app.goo.gl/N81cQgAShFXqKV4v9>).

The International Conference on Simulation of Semiconductor Processes and Devices (SISPAD) provides an international forum for the presentation of leading-edge research and development in the area of process and device simulation. SISPAD is one of the longest-running conferences devoted to technology computer-aided design (TCAD) and advanced modeling of novel semiconductor devices and nano electronic structures.

Committees


General Chair:	El Mehdi Bazizi	Applied Materials
Co-Chair/Technical Program Chair:	Hiu Yung Wong	San José State University
Conference Organizers:	Pratik B. Vyas	Applied Materials
	Santosh KC	San José State University
Honorary Committee:	R. Dutton	Stanford University
	S. Selberherr	TU Wien
	T. K.Taniguchi	Osaka University
Technical Program Committees:		USA
	El Mehdi Bazizi	Applied Materials
	Eric Guichard	Silvaco
	Gerhard Klimeck	Purdue University
	Irena Knezevic	UW-Madison
	Blanka Magyari-Kope	TSMC
	Victor Moroz	Synopsys Inc.
	Borna Obradovic	Intel
	Leonard F. Register	UT Austin
	Dragica Vasileska	Arizona State University
	Hiu Yung Wong	San José State University
		Europe
	Jean-Charles Barbe	CEA-LETI
	Lado Filipovic	TU Vienna
	Francisco Gamiz	Univ of Granada
	Markus Karner	Global TCAD Solutions
	Daniel Lizzit	University of Udine
	Denis Rideau	STMicroelectronics
	Andreas Schenk	ETH Zurich

Asia

Yoon-Suk Kim	Samsung
Yiming Li	NYCU
Hideki Minari	Sony
Nobuya Mori	Osaka University
Satofumi Souma	Kobe University
Hajime Tanaka	Osaka University
Jeff Wu	TSMC

Platinum Sponsors

SILVACO

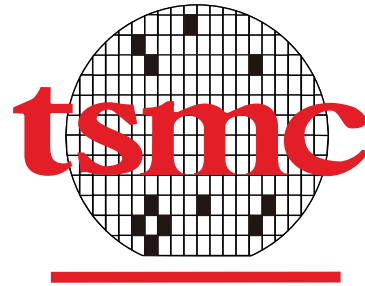

Gold Sponsors

SAMSUNG

SYNOPSYS®

Technical Sponsors



Logistic Sponsor



**SAN JOSÉ STATE
UNIVERSITY**

RESEARCH FOUNDATION

Plenary Speakers

Aveek Sarkar

Vice President, Synopsys Inc., USA

Delivering to the era with pervasive intelligence with TCAD technologies and solutions.

Abstract: The relentless pace of innovation in advanced logic and memory process nodes requires continued research on new materials, device structures and process recipes to deliver high quality, high performance, and robust solutions that enable atomistic and advanced transport modeling, complex etch and deposition profile prediction, large scale process emulation, variation analysis, and design-technology co-optimization. The evolution of TCAD towards complex 3D modeling solving 10's of millions of unknowns and in leveraging advances in computing with increased integration with design flows will enable this progress building up on the achievements in the past two decades. Equally exciting are the innovation happening in the specialty and wide-bandgap market driven by new applications and shortened time to market requirements. These in turn are forcing a complete re-think in the way these chips and their associated devices and processes are developed and manufactured. By leveraging physics-based modeling and Machine Learning technologies, TCAD has evolved to become mission critical in delivering to these needs.



Bio: Aveek Sarkar is passionate about enabling the semiconductor industry success through scalable, robust high-impact solutions and workflows. As VP, Engineering, and co-head of Synopsys' Customer Success Group, Aveek is responsible for the deployment of EDA workflows with semiconductor design, manufacturing, and ecosystem companies in addition to partnerships with academic and research institutions, working on mature node / wide band-gap specialty process to next generation advanced node processes, IPs and chips all with the mission to deliver the fastest path to success. Prior to Synopsys, Aveek was the co-GM of the Semiconductor BU at Ansys, a member of the executive team that established Apache as the industry leader in chip-package system power noise analysis, and a member of the technical staff at Sun Microsystems where he led the development of custom digital circuits and power management strategies for several generations of Sun's UltraSparc microprocessors. Aveek is a graduate of the Indian Institute of Technology, Kanpur, (BTech, EE), Oregon State University (MSEE), and Santa Clara University (MBA).

Barbara De Salvo

Director of Research, Meta, USA

The Future of Augmented Reality

Abstract: The human relationship with computers and information has evolved in a dramatic way in the last decades. Humanity encountered the first personal computer in the 50s, which eventually evolved in the Internet. Recent times have seen the revolution of the smart phone. Today, we're immersed into a vast ocean of virtual information and connections whenever and wherever we want, through two-dimensional surfaces which accompany us everywhere we go. Clearly, the future of our digital gateways will be even more portable and personal in the future. At Meta Reality Labs, we are developing the next generation computing platform, the AR/VR glasses which will combine virtual and real worlds, to serve human needs and to explore the limits of human experience. Silicon is only one piece of the many technologies that need to converge together to create a fully AR experience. We need to integrate Si together with displays, sensors, electrical and mechanical systems and not ultimately, AI algorithms. If the importance of performance-per watt is well known for mobile device, it will be even more critical for AR devices. In order to make this vision reality, we will need optimization at every level of the system, including novel revolutionary technologies and co-optimization of HW and SW.



Bio: Barbara De Salvo is Director of Research at Meta Reality Labs Research (USA). She leads a multi-disciplinary team, including technologists, Asic designers, Machine Learning (ML) algorithm, Computer Vision- scientists, and system engineers to drive the introduction of novel semiconductor technologies and new computing paradigms (as AI Cameras, Compute-In-Memory, On-Sensor-Compute) in next generation AR/VR product systems. Before joining Meta in 2019, she was Chief Scientist and Deputy Director of CEA-LETI (France), driving the path-finding strategy. In 2013-2015, she was visiting scholar in IBM-Albany-NY (USA) in the frame of the sub-10nm CMOS International Technology Alliance. She has authored more than 370 referred articles, ten book chapters, a monography on Silicon Non-Volatile Memories edited by Wiley and Sons. She served as General Chair of IEEE IEDM 2022, as well as chair of the IEEE Corporation Award Committee (2021, 2022). She is a Fellow of the IEEE, and an active member of the IEEE Women in Engineering network.

Invited Speakers



Woosung Choi

Vice President, Device Lab, Samsung, USA

Bio: Woosung Choi, VP of Engineering and Lab head of the TCAD lab, Samsung Device Solutions Research America. Woosung Choi received the Ph. D degree in Electronics Engineering in 1995 from the Seoul National University. He joined Technology Modeling Associates in 1996 as a developer. He worked on numerous development projects while he was with TMA, Avant!, and Synopsys from 1996 to 2010. In 2011, he joined Samsung R&D in US and started a laboratory that focuses on TCAD modeling and in house simulator development.

His main effort is on organizing and empowering a very capable R&D team that can solve the difficult modeling problems of all types of devices including DRAM flash power and logic, and fabrication process of modern semiconductor technology.



Tillmann Kubis

Associate Professor, Purdue Univ, USA

Bio: Tillmann Kubis is Katherine Ngai Pesic & Silvaco Associate Professor in the Elmore Family School of Electrical and Computer Engineering of Purdue University. He received his PhD from the Technische Universität München (Germany) in theoretical semiconductor physics in 2009. His early quantum transport software powers the quantum cascade laser, resonant tunneling diode and quantum well functionality of the commercial software nextnano. Since 2011, he has been working on developing quantum transport methods and their numerically efficient implementation in highly scalable, industrially relevant simulation tools collaborating with many semiconductor companies (Intel, Samsung, TSMC, Lumileds, IBM, GlobalFoundries, Hamamatsu Optics, Silvaco) on predicting charge, heat, and spin transport in semiconductor nanodevices, optoelectronics, 2D materials and topological insulators. Tillmann Kubis is core developer of Purdue's quantum code library. He leads the NEMO5 development and the commercialization collaboration with Silvaco since 2018.



Blanka Magyari-Köpe

R&D Technical Manager, TSMC, USA

Bio: Blanka Magyari-Köpe is currently a Technical Manager in R&D, TCAD Division at TSMC in San Jose, CA since early 2019. She received her Ph.D. degree in Physics in 2003 from the Royal Institute of Technology in Sweden, did postdoctoral studies at UCLA, and went on to continue her research at Stanford University as Senior Research Engineer. Her scientific interest has been in interdisciplinary research, focused on developing atomistic models to tackle nanoscale phenomena that includes characterization of defects, manipulating interfaces at atomic level, improving thin film depositions and material optimizations for advanced semiconductor devices. She is Senior IEEE Member since 2017 and her awards include the 2018 Dennis Gábor prize for innovation in memory technology from Novofer Foundation. During her career Dr. Magyari-Köpe has been on the committees of IEDM Modeling and Simulation and Memory Technology, SISPAD and ESSDERC, co-organized sessions at APS and ECS, co-edited the book “Advances in Non-Volatile Memory and Storage Technology” published by Elsevier, served as Associate Editor for Journal of Computational Electronics and organized a special Focus Topic Issue on “Computational Electronics of Emerging Memory Elements”. She has given over 40 invited talks, co-authored 100 scientific papers and 8 patents and served as a panelist on SRC Decadal Plan for Semiconductors Webinar Series in 2022.



Victor Moroz

Synopsys Fellow, Synopsys Inc., USA

Bio: Victor Moroz received the M.S. degree in electrical engineering from Novosibirsk Technical University, Siberia, Russia, and the Ph.D. degree in applied physics from the University of Nizhny Novgorod, Nizhny Novgorod, Russia, in 1992. After engaging in technology development at several semiconductor manufacturing companies and teaching semiconductor physics at the university, he joined Stanford Spin-Off Technology Modeling Associates in 1995. After initial public offering (IPO) in 1997, the Technology Modeling Associates (TMA), Sunnyvale, CA, USA, TCAD Team became a part of Avanti Fremont, CA, USA, in 1998, and in 2002, it became a key part of Synopsys, Mountain View, CA, USA, connecting a synthesis company to the manufacturing. He is currently a Synopsys Fellow, engaged in a variety of projects on modeling advanced CMOS with over 300 granted and pending U.S. and international patents. Dr. Moroz serves as an Editor for IEEE Electron Device Letters



Souvik Mahapatra

Professor, IIT Bombay, India

Bio: Souvik Mahapatra is a professor of Electrical Engineering at IIT Bombay. He works in the area of reliability of CMOS logic and flash memory devices. He interacts closely with several leading industries in IDM, fab, fabless, fab tool and EDA space. He has authored or co authored more than 200 papers in peer reviewed journals and conferences, 22 book chapters, edited 2 books, and delivered invited talks and tutorials in major IEEE conferences. He's a fellow of IEEE and of several Indian science and engineering societies (INSA, INAE, IASc).



Denis Rideau

STMicroelectronics, France

Bio: Denis Rideau received a Ph.D. degree in Physics from the University of Orsay, France in 2001, and an Engineering degree at ESIEE, Paris in 1996. He is now performing TCAD simulations at STMicroelectronics, Crolles in France. His research interests are modelling and simulation of semiconductor nanodevices, with emphasis on quantum effects, strain effects, wafer orientations, and alternative channel materials in FDSOI and FinFets transistors. He is currently working on the design and the modelling of advanced optical sensors and SPAD devices. He has developed several codes for computing the electronic bandstructures in strain Si, Ge, and SiGe devices using semi-empirical approaches. He investigates by means of TCAD simulations advanced devices, including alternative III-V channel materials and new materials for optoelectronics. In parallel he developed advanced solvers (Monte Carlo and NEGF) to simulate the transport properties of single-gate and multi-gate devices featuring stress, substrate orientation, SiGe materials and high-k/metal gate. He is an expert in the calibration of industrial TCAD software aiming in providing parameters but also validation and benchmarking on experimental.

Workshop/Tutorial



Chung-Hsun Lin

Senior Director, Intel, USA

Advanced CMOS Transistor Scaling Towards 1nm Node and Beyond

Abstract: As FinFET scaling comes to an end in 3nm node, there are several innovative device and standard cell architectures considered for 2nm node and beyond: from gate-all-around (GAA) transistor, backside power delivery, complementary FET (CFET), to atomic channel FET with 2D materials. The GAA transistor is the most pragmatic architecture in the near term to enable incremental contact-poly pitch and gate length scaling because of its limited perturbation to a conventional FinFET process integration and design flows. Backside power delivery and CFET (3D stacking) technology brings additional cell level area scaling benefit as well as heterogeneous integration benefit for high mobility channel enablement. 2D material FET provides the ultimate gate length scaling with high mobility channel capability. In this short course, we will focus on technology and device design value proposition for these innovations with the corresponding engineering opportunities and challenges for high volume manufacturing.



Steven Hung

Senior Director/Scientist, Applied Materials, USA

Innovations of Material and Process Engineering in the Angstrom Era for Advanced CMOS Logic Technology

Abstract: The relentless pursuit of Moore's Law scaling has led to the emergence of the Angstrom era. 3D device architectures, such as gate-all-around (GAA) transistors, provide enhanced control and scalability. Process advancements include EUV lithography, atomic layer deposition & etching, and directed self-assembly deposition enabling precise control at the atomic scale. These innovations overcome fundamental limitations, delivering significant improvements in power, performance, area & cost (PPAC) as well as facilitating continuous advancement in CMOS technology for next generation computing applications. This tutorial explores the pivotal role of material and process advancements in the Angstrom era pushing the boundaries of advanced logic CMOS technology.

Firstly, it delves into the current state-of-art GAA nanosheet (NS) technology and the key challenges. Various process and device solutions to extend GAA NS for upcoming technology nodes will be discussed. The synergistic effects of integrating material and process innovations leading to enhanced device performance, reduced power consumption and area scaling in GAA NS technology will be addressed.

Furthermore, this course will examine the 3D CFET/Stacked-FET architecture and its fabrication options. It will also highlight the recent progress of monolithic-CFET (m-CFET) in the industry. Lastly, key unit process bottlenecks will be illustrated in a generic m-CFET flow.



Philippe Blaise

Silvaco, USA

Atomistic Simulation, a Key Enabler for Next-Generation TCAD Tools

Abstract: The atomistic simulation tools are very promising, bringing advanced functionalities with unprecedented predictive power. Nevertheless, they are not easy to use and qualify which slows down their adoption by the TCAD community. This presentation will illustrate the full potential of atomistic simulation on several examples, with a special focus on quantum transport for small structures and 2D materials. We will also explore the various links between quantum chemistry, quantum transport and conventional TCAD. The ultimate goal is to embed the atomistic simulation in the prototyping effort of advanced devices. We hope to deliver a guide for non-specialists in quantum physics to use such tools in their daily work.



Ilon Joseph

Acting Group Leader, LLNL, USA

Quantum Computing for Fusion Energy Science Applications

Abstract: Quantum computing promises to deliver large gains in computational power that can potentially benefit a number of Fusion Energy Science (FES) application areas. We will review our recent efforts [1] to develop and extend quantum algorithms to perform both classical and quantum FES-relevant calculations, as well as to perform calculations on present-day quantum hardware platforms. We have developed and explored quantum algorithms that can compute nonlinear and non-Hamiltonian dynamics by simulating the Koopman-von Neumann and Liouville equations; perform eigenvalue estimation for generalized eigenvalue problems common in plasma physics and MHD theory; simulate nonlinear wave-wave interactions; and explore the chaotic dynamics of both quantum and classical systems. We have implemented toy models of these algorithms on state-of-the-art quantum computing architectures to test the fidelity of emerging quantum hardware capabilities including Grover's search, nonlinear three-wave interactions, and the chaotic dynamics of the quantum sawtooth map, a simple model for wave-particle interactions. The fidelity of the experimental results match noise models that include decay and dephasing processes and highlights key differences between state-of-the-art approaches to quantum computing hardware platforms.



Yuhao Zhang

Associate Professor, CPES, Virginia Tech, USA

TCAD Simulation in Power Semiconductors and Power Electronic

Abstract: Power electronics technologies provide electrical energy conversion using semiconductor devices and passive components. The global power semiconductor market has reached US\$40 billion and is rapidly expanding, driven by applications like electric vehicles, data centers, consumer electronics, electric grids, and renewable energy processing. TCAD simulation is critical for the design, packaging, circuit application, and reliability studies of power devices. As the operation of power devices involves the concurrence of high voltage and high current in submicron-second, large-signal switching transients, their TCAD simulations, particularly for devices based on wide-bandgap (WBG) and ultra-wide bandgap (UWBG) semiconductors, face unique challenges and opportunities. This talk will introduce such challenges and opportunities using examples of WBG and UWBG device simulation in the following topics: 1) high-field carrier transport and breakdown simulation, 2) device-package electro-thermal simulation, 3) device-circuit mixed-mode simulation, and 4) stability, reliability, and robustness simulation.



Norman Chang

Ansys Fellow, Ansys, USA

Challenges and Solutions on Physical Integrity of 3D Heterogeneous Integration System

Abstract: Emerging 3DIC systems enabled by advanced packaging techniques promise high integration density and manufacturing yield. However, due to the complexity of integrating multiple, heterogeneous chiplets into a chip-package system, multi-die applications that are built with 3DICs are challenged by multi-physics issues on power, signal, thermal, structural, and timing integrity. In this tutorial, a comprehensive EDA platform will be illustrated that uses 3Dblox™ to enable 3DIC multi-physics simulation at all multi-die design stages - from early physical architecture planning to final design signoff. This platform enabled by a novel methodology for system technology co-optimization will also be reviewed by using Generative AI (GenAI) and ML-assisted approaches. This allows the platform to address a range of multi-physics design and optimization challenges. Successful example multi-physics applications will be described.

Program at a Glance

Tuesday, September 24th

Workshop Session 1: Chung-Hsun Lin (Intel)	Sainte Claire Ballroom	9:00AM-10:00AM
Workshop Session 2: Steven Hung (Applied Materials)	Sainte Claire Ballroom	10:00AM-11:00AM
Workshop Session 3: Philippe Blaise (Silvaco)	Sainte Claire Ballroom	11:00AM-12:00PM
Lunch Break	Atrium Room	12:00PM-1:30PM
Workshop Session 4: Ilon Joseph (LLNL)	Sainte Claire Ballroom	1:30PM-2:30PM
Workshop Session 5: Yuhao Zhang (CPES)	Sainte Claire Ballroom	2:30PM-3:30PM
Workshop Session 6: Norman Chang (ANSYS)	Sainte Claire Ballroom	3:30PM-4:30PM

Wednesday, September 25th

Breakfast	Atrium Room	8:00AM-8:45AM
Conference Opening	Grand Ballroom	8:45AM-9:00AM
Plenary Talk I: Barbara De Salvo	Grand Ballroom	9:00AM-9:50AM
Coffee Break	Atrium Room	9:50AM-10:10AM
Breakout Session 1 (Chair: William Vandenberghe) Invited: Tillmann Kubis General: Process Modeling (4 papers)	Grand Ballroom	10:10AM-12:00PM
Breakout Session 2 (Chair: Yuhao Zhang) Invited: Victor Moroz General: Power Devices (3 papers)	Sainte Claire Ballroom	10:10AM-12:00PM
Lunch Break	Atrium Room	12:00PM-1:30PM
Breakout Session 3 (Chair: Lee Smith) General: 2D Materials (5 papers)	Grand Ballroom	1:30PM-3:10PM
Breakout Session 4 (Chair: Tillmann Kubis) General: First Principles & Transport (5 papers)	Sainte Claire Ballroom	1:30PM-3:10PM
Coffee Break	Atrium Room	3:10PM-3:30PM
Poster Session:	Sainte Claire Ballroom	3:30 PM-5:30PM
Reception	Grand Ballroom	6:00PM-8:00PM

Thursday, September 26th

Breakfast	Atrium Room	8:00AM-8:45AM
Plenary Talk II: Aweek Sarkar	Grand Ballroom	9:00AM-9:50AM
Coffee Break	Atrium Room	9:50AM-10:10AM
Breakout Session 5 (Chair: Phillipe Blaise) Invited: Souvik Mahapatra General: Ferroelectric Modeling (4 papers)	Grand Ballroom	10:10AM-12:00PM
Breakout Session 6 (Chair: Pratik Vyas) Invited: Denis Rideau General: Sensors & Optoelectronics (4 papers)	Sainte Claire Ballroom	10:10AM-12:00PM
Lunch Break	Atrium Room	12:00PM-1:00PM
Breakout Session 7 (Chair: Souvik Mahapatra) General: Memory (5 papers)	Grand Ballroom	1:00PM-2:40PM
Breakout Session 8 (Chair: Denis Rideau) General: Machine Learning/AI-based Modeling (5 papers)	Sainte Claire Ballroom	1:00PM-2:40PM
SISPAD Social Event	Pier 39	3:00PM-8:00PM

Friday, September 27th

Breakfast	Atrium Room	8:00AM-8:45AM
Breakout Session 9 (Chair: Yiming Li) Invited: Blanka Magyari-Kope General: Advanced CMOS Logic (3 papers)	Grand Ballroom	9:00AM-9:50AM
Breakout Session 10 (Chair: Satofumi Souma) Invited: Woosung Choi General: Quantum Computing (3 papers)	Sainte Claire Ballroom	9:00AM-9:50AM
Coffee Break	Atrium Room	10:30AM-10:50AM
Breakout Session 11 (Chair: Woosung Choi) General: Planar CMOS (3 papers)	Grand Ballroom	10:50AM-11:50AM
Breakout Session 12 (Chair: Blanka Magyari-Kope) General: Packaging Modeling (3 papers)	Sainte Claire Ballroom	10:50AM-11:50AM
Lunch Break	Atrium Room	12:00PM-1:30PM
Closing Remark	Grand Ballroom	1:30PM-2:00PM

General Information

Conference Venue

The conference will be held in presence at the The Westin San José located in 302 S Market St, San Jose, California, 95113 (<https://maps.app.goo.gl/N81cQgAShFXqKV4v9>).

San José

San José is a city located in the heart of Silicon Valley in Northern California, United States. It's the largest city in terms of both population and area within Santa Clara County. San José is known for its thriving tech industry, diverse population, and a blend of urban and suburban landscapes.

How To Reach San José

San José is easily accessible by various modes of transportation due to its location in Silicon Valley, California.

Here are the common ways to reach San José:

By Air:

The most convenient way to reach San José from distant locations is by flying into the Norman Y. Mineta San José International Airport (SJC). It's a major airport serving the city and offers both domestic and limited international flights.

By Car:

If you're traveling within California or nearby states, you can reach San José by car. Major highways that connect to San José include Interstate 280 (I-280), Interstate 680 (I-680), and U.S. Route 101 (US-101).

By Public Transit:

If you're already in the San Francisco Bay Area, you can use the Bay Area Rapid Transit (BART) system to get relatively close to San José and then transfer to the Santa Clara Valley Transportation Authority (VTA) light rail or bus services to reach your final destination within the city.

Invited Talks

Wed, September 25th

Breakout Session 1

Grand Ballroom | 10:10AM-10:40AM

Mode space in DFTB quantum transport in the nanodevice simulation tool NEMO5

Logan Melican, Han-Wei Hsiao, Daniel Lemus and Tillmann Kubis

Breakout Session 2

Sainte Claire Ballroom | 10:10AM-10:40AM

Logic DTCO/STCO

Victor Moroz, Synopsys Inc.

Thu, September 26th

Breakout Session 5

Grand Ballroom | 10:10AM-10:40AM

A TCAD to SPICE Simulation Framework for Analysis of Device to Circuit BTI and HCD Aging

Payel Chatterjee, Karansingh Thakor and Souvik Mahapatra

Breakout Session 6

Sainte Claire Ballroom | 10:10AM-10:40AM

Approaches to Simulating Meta-surfaces for Flat Optical Devices: The Transition to Solutions Based on Neural Networks

Denis Rideau, Mathys Le Grand, Loumi Tremas, Louis Henri Fernandez-Mouron, Valerie Serradeil, Damien Maitre, Bruce Ray, James Downing, Pascal Urard, Habib Mohamad and Enrico Carnemolla

Fri, September 27th

Breakout Session 11

Grand Ballroom | 9:00AM-9:30AM

Advances in Modeling of Interconnect Materials

Blanka Magyari-Kope and Jeff Wu

Breakout Session 12

Sainte Claire Ballroom | 9:00AM-9:30AM

Hierarchical simulation of monolithic CFETs using atomistic and continuum models

Woosung Choi, Hyeon-Kyun Noh, Hong-Hyun Park, Anh-Tuan Pham, Seonghoon Jin, Byounghak Lee, Chihak Ahn, Hiroyuki Kubotera and Dae Sin Kim

Breakout Sessions

Wed, September 25th

Breakout Session 1 | Process Modeling

Grand Ballroom | 10:10AM-12:00PM

Invited Talk

10:10AM-10:40AM

Mode space in DFTB quantum transport in the nanodevice simulation tool NEMO5

Logan Melican, Han-Wei Hsiao, Daniel Lemus and Tillmann Kubis

Paper 1.1 (ID: 56)

10:40AM-11:00AM

MD simulation of epitaxial recrystallization and defect structure of Al-implanted 4H-SiC

Sabine Leroch (University of Technology Vienna), Robert Stella (University of Technology Vienna), Andreas Hössinger (Silvaco Europe Ltd.) and Lado Filipovic (University of Technology Vienna)

Abstract

The 4H-SiC structure is highly technologically relevant because of its good thermal conductivity, the high electric field breakdown strength, and the widest band gap of 3.26 eV among the alternative SiC polytypes. Thus, it plays a major role in semiconductor fabrication. The as-implanted amorphous 4H-SiC structure was produced by high dose Al implantation at room temperature in our previous molecular dynamics (MD) study. To provide a large number of carriers in the band gap the Al dopants must occupy Si-lattice sites in a nearly defect-free 4H-SiC crystal. To reduce the number of defects and to recrystallize the as-implanted SiC, thermal annealing was done at temperatures ranging from 1000 to 2150 K. We investigated the basic mechanisms for recrystallization such as epitaxial regrowth as well as the role of the Al dopant in this process in dependence of temperature and time in comparison to experiments. Where we could show that the general physical behavior of the system is maintained in the MD simulation. Moreover, we discussed the remaining defect structure consisting of single point defects, defect complexes and small defect clusters after high temperature annealing.

Paper 1.2 (ID: 19)

11:00AM-11:20AM

Generalization of Fick's law and derivation of interface segregation parameters using microscopic atomic movements

Chihak Ahn (Samsung semiconductor Inc.), Joohyun Jeon (Samsung Electronics), Seungmin Lee (Samsung Electronics), Woosung Choi (Samsung Semiconductor Inc.), Dae Sin Kim (Samsung Electronics.), and Nick Cower (Newcastle University)

Abstract

Using a microscopic picture of atomic movement we rederived the Fick's diffusion flux equation which naturally includes all types of drift terms (e.g. electrical drift, stress driven movement, and binding energy related effects). With a similar method, two phase segregation transfer rate and three phase segregation trapping/emission rates are also defined with measurable or calculable quantities.

Paper 1.3 (ID: 03)

11:20AM-11:40AM

Identification of key atomic process of Metal-induced lateral crystallization from First-principles Calculations

Yutaro Ogawa (Advanced Memory Development Center, Memory Division, Kioxia Corporation),
Hikari Suzuki (Core Technology Research Center, Frontier Technology R&D Institute, Kioxia Corporation),
and Masayasu Miyata (Advanced Memory Development Center, Memory Division, Kioxia Corporation)

Abstract

In order to improve the efficiency of metal-induced lateral crystallization (MILC) using Ni, it is important to understand the fundamental mechanisms. In this study, the NiSi₂/amorphous Si (a-Si) interface is appropriately modeled and the atom transfer behavior during the MILC process was explored by first-principles calculations. It is found that the overall picture of MILC mechanism can be effectively comprehended through three fundamental processes: (1) the formation of Ni vacancies at the a-Si interface, (2) the diffusion of Ni vacancies within the bulk NiSi₂, and (3) the reconstruction of the c-Si interface. The trends under stress, observed in experiments, are explained by applying this mechanism to the MILC process.

Paper 1.4 (ID: 23)

11:40AM-12:00PM

Modeling Non-Uniformity During Two-Step Dry Etching of Si/SiGe Stacks for Gate-All-Around FETs

Ziyi Hu (Institute of Microelectronics, Chinese Academy of Sciences), Lado Filipovic (CDL for Multi-Scale Process Modeling of Semiconductor Devices and Sensors, Institute for Microelectronics, TU Wien), Junjie Li (Institute of Microelectronics, Chinese Academy of Sciences), Lingfei Wang (Institute of Microelectronics, Chinese Academy of Sciences), Zhicheng Wu (Institute of Microelectronics, Chinese Academy of Sciences), Rui Chen (Institute of Microelectronics, Chinese Academy of Sciences), Yayi Wei (Institute of Microelectronics, Chinese Academy of Sciences) and Ling Li (Institute of Microelectronics, Chinese Academy of Sciences).

Abstract

As advanced-node semiconductor devices scaled down and more electrostatic control over the channel became essential, the gate-all-around field-effect transistor (GAAFET) became the go-to geometry to take over after the FinFET. GAAFET devices achieve longer effective channels by providing access to multiple channel pathways and by introducing strain in the channel. One of the most critical steps in GAAFET fabrication is the selective lateral etching of the SiGe layers, which is the basis for the formation of an inner-spacer.

The difficulty of selective SiGe etching is ensuring high control over the lateral depth and shape of the SiGe layer while minimizing Si layer loss. Existing studies show that there is a non-uniform profile on the substrate surface during wet or dry selective etching of SiGe, which cannot be modeled using standard process TCAD (Technology Computer Aided Design) approaches.

In this paper, we propose a method for the continuous simulation of the two-step dry etching process – anisotropic etching of the Si/SiGe stack and subsequent isotropic selective etching of SiGe – to study the mechanism behind the non-uniform profile formation. The proposed method is able to simulate the non-uniform profile accurately, which was calibrated and verified with experimental data.

Breakout Session 2 | Power Devices**Sainte Claire Ballroom | 10:10AM-12:00PM****Invited Talk**

10:10AM-10:40AM

Logic DTCO/STCO*Victor Moroz, Synopsys Inc.***Paper 2.1 (ID: 65)**

10:40AM-11:00AM

Simulating Terahertz Plasma Oscillations in Transistors*Ashwin Tunga (University of Illinois Urbana-Champaign), Michael Shur (Rensselaer Polytechnic Institute),
Matt Grupen (Air Force Research Laboratory Sensors Directorate), David Hill (SRI International), and
Shaloo Rakheja (University of Illinois Urbana-Champaign)***Abstract**

Terahertz plasma oscillations in GaN HEMTs are simulated in a TCAD environment using the Fermi kinetics transport model. Parallels are drawn between the Boltzmann transport equation and the shallow water dynamics used in previous studies to explain the oscillations. The necessary simulation conditions needed to observe the oscillations in a TCAD environment are described. Further discussion on the significance of the average momentum relaxation time and the rationale for choosing its value is presented. Transient simulations of THz oscillations are demonstrated when the gate voltage is perturbed at the quiescent point. A physical theory of the plasma oscillations is proposed by analyzing the oscillations in channel electron concentration, electron temperature and electric field with time. The electron temperature and electric field profiles are observed to be out of phase with each other, alluding to the fact that the energy is exchanged back and forth between the hot electrons and the EM fields, leading to the plasma oscillations.

Paper 2.2 (ID: 70)

11:00AM-11:20AM

**Novel Mobility Enhancement Schemes for Next Generation Silicon Carbide (SiC)
Trench MOSFET Technology***Pratik B Vyas (Applied Materials Inc.), Ashish Pal (Applied Materials Inc.), Stephen Weeks (Applied Materials Inc.),
Joshua Holt (Applied Materials Inc.), Archana Kumar (Applied Materials Inc.), Lucien Date (Applied Materials Inc.),
Ludovico Megalini (Applied Materials Inc.), Michel Khoury (Applied Materials Inc.), Durga Chaturvedula (Applied Materials
Inc.), Michael Chudzik (Applied Materials Inc.), Siddarth Krishnan (Applied Materials Inc.), Subi Kengeri (Applied Materials
Inc.) and El Mehdi Bazizi (Applied Materials Inc.)***Abstract**

New mobility improvement solutions are proposed for next generation SiC trench MOSFET with higher aspect ratio trenches. A combination of channel counter-implant and pocket implant is shown to be most effective for improving mobility without VT loss. Using our proposed integration scheme and calibrated modeling, we project an 80% improvement in mobility and 40% improvement in channel resistance, realizing the true potential of trench MOSFET architecture for next generation SiC power device technology.

Paper 2.3 (ID: 74)

11:20AM-11:40AM

Cluster-based semi-empirical model for dopant activation in silicon carbide

Balazs Bamer (*Institute for Microelectronics, TU Wien*), Sabine Leroch (*Institute for Microelectronics, TU Wien*),
Andreas Hössinger
(*Silvaco Europe Ltd*) and Lado Filipovic (*Institute for Microelectronics, TU Wien*).

Abstract

We present a cluster-based semi-empirical model for dopant activation in silicon carbide. We model the following species: dopants on lattice points, point defects, dopant-defect pairs, and small clusters of different sizes. We define the possible reactions between these species, add their reaction kinetics, and use a system of ordinary differential equations to model the time evolution of the concentration of the different species during annealing. We use the MaxLIPO+TR optimizer to obtain the post-implant conditions of the SiC film, including the various cluster concentrations. These concentrations are not measurable and can only be calculated through time-intensive atomistic simulations, which we apply to verify and calibrate our model. Our work gives a practical solution to predict as-implanted defect concentrations, which is missing from previous works.

Breakout Session 3 | 2D Materials**Grand Ballroom | 1:30PM-3:10PM****Paper 3.1 (ID: 101)**

1:30PM-1:50PM

Towards Low Contact Resistance Metal-Transition Metal Dichalcogenide Contacts – A Quantum Transport Study

Pranay Kumar Reddy Baikadi (*The University of Texas at Dallas*), Raseong Kim (*Components Research, Intel Corporation*),
Peter Reyntjens (*KU Leuven*), Ashish Verma Penumatcha (*Components Research, Intel Corporation*),
Maarten Van de Put (*Imec, Leuven*), and William Vandenberghe (*The University of Texas at Dallas*)

Abstract

In this study, we use Non-Equilibrium Green's Function (NEGF) based quantum transport simulations to investigate metal-Transition-Metal Dichalcogenide (TMD) top contacts. Using MoS₂ as an example TMD, we explore the impact of the surrounding dielectric and spatially non-uniform doping on contact resistance (R_c), while accounting for image-force barrier lowering (IFBL). We find that a low- κ top dielectric is crucial in reducing the tunneling width (TW) for the electrons and thus R_c . We also find that heavily doping the MoS₂ layer underneath the metal has an insignificant effect in terms of reducing TW and R_c .

Paper 3.2 (ID: 63)

1:50PM-2:10PM

Contact Resistance in Monolayer MoS₂ Edge-Contacts: “Electrostatic” vs Substitutional doping

Madhuchhanda Brahma (*University of Texas at Dallas*), Maarten L. Van de Put (*University of Texas at Dallas*), Edward Chen
(*Taiwan Semiconductor Manufacturing Company (TSMC)*), Massimo V. Fischetti (*University of Texas at Dallas*), and
William G. Vandenberghe (*University of Texas at Dallas*)

Abstract

Two-dimensional materials, owing to their unique structure and electronic properties, have emerged as alternative channel materials to Silicon to extend the CMOS scaling beyond the Moore's Law projection. However, a severe

bottleneck that negates most of the advantages and prohibits these materials from practical industrial application: high contact resistance, primarily due to the presence of a high Schottky barrier at the interface with metal contacts. While some theoretical studies have examined the 2D material contacts, focusing on simplified models excluding Schottky barrier junction [1] or study of the interface chemistry and extraction of Schottky barrier height [2-3], and ab initio quantum transport simulation of the carrier injection methods [2-4], the influence of surrounding dielectric and image force barrier lowering, computationally difficult in density functional theory (DFT) studies, has been rarely investigated. Recent studies have highlighted the significant impact of surrounding dielectrics on contact resistance of 2D materials, indicating the importance of a low-dielectric environment for achieving low-resistance contacts [5-8]. In our most recent work, we showed that, in addition to degenerately doping the channel, a low- κ dielectric environment is favorable for achieving low resistance contacts, with its effect being more pronounced than the interface coupling strength of the 2D material edge contacts [6].

While substitutional doping [9] often leads to heavily doped 2D materials with accompanying lattice and surface defects, “electrostatic” doping [10], i.e. modulating charge carriers by back-gate bias, offers a non-destructive alternative. In this paper, we develop a model to calculate transmission through metal-2D edge-contact configurations, incorporating effects of surrounding dielectric and back-gate bias and compare the contact resistance in substitutionally doped contacts with “electrostatically” doped ones. For substitutionally doped contacts without gate bias, we considered infinitely thick top and bottom oxides, while for “electrostatically” doped edge contacts, we selected a bottom oxide of finite thickness. We consider various structures (shown schematically in Fig. 1) of monolayer molybdenum disulfide (MoS₂) edge-contact, and utilize band structure from DFT calculations and the Wentzel–Kramers–Brillouin (WKB) approximation to calculate the transmission probabilities through the Schottky barrier [6]. Numerical solutions to Poisson’s equation provide the electrostatic potential within the 2D semiconductor, while analytical methods account for image-force barrier lowering [6]. Our results (Fig. 2) indicate that in “electrostatically” doped edge-contacts, low- κ top and bottom insulators result in low-contact resistance. The image-force barrier-lowering in edge-contacts at distances much larger than the 2D layer thickness, is determined by the back-gate bias (Fig. 3), whereas in substitutionally doped contacts, it is controlled by the dielectric permittivity of the surrounding oxide and the TMD [6]. Additionally, we observed that in all cases, “electrostatically” doped devices exhibit worse contact resistance than substitutionally doped ones, and only very high gate bias, such as $> 1\text{V}$, can yield sufficiently low contact resistance when using a high- κ back gate oxide.

Paper 3.3 (ID: 76)

2:10PM-2:30PM

Efficient Quantum Simulations of Devices Based on 2D Materials Including Vertical Heterojunctions

Alfonso Sanchez-Soares (EOLAS Designs), Thomas Kelly (EOLAS Designs), Sheng-Kai Su (Taiwan Semiconductor Manufacturing Company), Edward Chen (Taiwan Semiconductor Manufacturing Company), James C Greer (University of Nottingham Ningbo China) and Giorgos Fagas (Tyndall National Institute, University College Cork).

Abstract

We present a modelling framework that enables efficient exploration of the electrical performance of devices based on 2D material heterojunctions. Electronic structure data from density functional theory (DFT) simulations is used to extract parameter for $k.p$ Hamiltonians. Material models are then employed in device simulations based on non-equilibrium Green's functions (NEGF) for a quantum-mechanical description of charge transport. Electron-phonon scattering is included in order to account for dissipative phenomena as well as phonon-assisted interlayer charge transport. We demonstrate our methodology with an application on a Dirac-source field-effect transistor (DS-FET) based on a monolayer MoS₂ channel (ML-MoS₂) with a graphene contact.

Paper 3.4 (ID: 67)

2:30PM-2:50PM

First-principles study of the origins of random telegraph noise in MoS₂/hBN-based field-effect transistors

Ryong-Gyu Lee (Korea Advanced Institute of Science & Technology (KAIST)), Jiyeon Song (Korea Advanced Institute of Science & Technology (KAIST)) and Yong-Hoon Kim (Korea Advanced Institute of Science & Technology (KAIST)).

Abstract

In the development of nanoscale field-effect transistor (FET) devices, defects in the gate dielectric are becoming a more critical factor for device reliability. However, the atomistic understanding of the instabilities in threshold voltage such as bias-temperature instabilities, 1/f noise, and random telegraph noise (RTN) remains limited. Herein, we describe our effort in establishing first-principles theoretical tools for the analysis of RTN. We consider hexagonal boron nitride (hBN)-encapsulated MoS₂-based 2D FETs, with various defect candidates introduced in the hBN layer. Based on the multi-space constrained-search density functional theory framework, we study the defect energetics under different temperature and gate-bias conditions. Mapping to the non-radiative multi-phonon model, configuration coordinate diagram analyses provide the classical activation barriers for defect trapping/de-trapping behaviors and capture and emission times for RTN. Our results reveal that both hBN CB and VN defects can contribute to fast and slow RTNs for the MoS₂ FET, respectively.

Paper 3.5 (ID: 104)

2:50PM-3:10PM

Switching Behavior of Graphene Nanoribbon FETs

Mathias Pech (TU Dortmund) and Dirk Schulz (Technical University Dortmund)

Abstract

An efficient model capable of the time-resolved modeling of armchair graphene nanoribbon field-effect transistors based on a Wigner Transport Equation with non-parabolic corrections is presented. With the inclusion of a mode-space approach the computational burden is heavily reduced. The resulting charge carrier and current densities agree well with those obtained through a real space tight-binding formulation of a non-equilibrium Greens Function method in the stationary case. The self-consistent and transient capabilities of our proposed approach are demonstrated for the THz switching behavior. Furthermore, the presented method is well suited for the analysis of nanotubes or nanoribbons composed of different materials, as well as for the extension to interband transport.

**Breakout Session 4 |
First Principles & Transport**
Sainte Claire Ballroom | 1:30PM-3:10PM
Paper 4.1 (ID: 52)

1:30PM-1:50PM

Band alignment in GAA nanosheet structures from density dependent hybrid functional and many-body GW methods

Troels Markussen (Synopsys Denmark), Rasmus Faber (Synopsys Denmark), Petr Khomyakov (Synopsys Denmark), Brecht Verstichel (Synopsys Denmark) and Anders Blom (Synopsys Inc).

Abstract

In the development of nanoscale field-effect transistor (FET) devices, defects in the gate dielectric are becoming a

more critical factor for device reliability. However, the atomistic understanding of the instabilities in threshold voltage such as bias-temperature instabilities, $1/f$ noise, and random telegraph noise (RTN) remains limited. Herein, we describe our effort in establishing first-principles theoretical tools for the analysis of RTN. We consider hexagonal boron nitride (hBN)-encapsulated MoS₂-based 2D FETs, with various defect candidates introduced in the hBN layer. Based on the multi-space constrained-search density functional theory framework, we study the defect energetics under different temperature and gate-bias conditions. Mapping to the non-radiative multi-phonon model, configuration coordinate diagram analyses provide the classical activation barriers for defect trapping/de-trapping behaviors and capture and emission times for RTN. Our results reveal that both hBN CB and VN defects can contribute to fast and slow RTNs for the MoS₂ FET, respectively.

Paper 4.2 (ID: 84)

1:50PM-2:10PM

Cation Disorder Limited IGZO Mobility Calculation Based on the Density Functional Theory

Seung Hyo Han (Korea Advanced Institute of Science and Technology), Deokhwa Seo (Korea Advanced Institute of Science and Technology), Jun-Hwe Cha (R&D Division, SK hynix Inc.), Seiyon Kim (R&D Division, SK hynix Inc.) and Mincheol Shin (Korea Advanced Institute of Science and Technology)

Abstract

In this work, we present a density functional theory (DFT) based method to calculate the electrical properties of crystalline IGZO channel material. The cation disorder limited mobilities of crystalline IGZO with various composition ratios are calculated by directly utilizing DFT-generated samples and their Hamiltonians, and results in good agreement with experimental data are obtained. Furthermore, a model Hamiltonian is introduced to perform calculations for larger sized devices. Our method enables rigorous and efficient evaluation of electrical properties for IGZO of various compositions, covering both Zn-rich and In-rich cases.

Paper 4.3 (ID: 08)

2:10PM-2:30PM

Tunneling quantum correction potential model for drift-diffusion simulations of Schottky contact resistance

Anh Tuan Pham (Samsung), Mohammad Ali Pourghaderi (Samsung), Seonghoon Jin (Samsung), Seunghyun Song (Samsung), Yonghee Park (Samsung), Uihui Kwon (Samsung), Woosung Choi (Samsung) and Dae Sin Kim (Samsung).

Abstract

A new approach based on tunneling quantum correction potential is proposed for Schottky contact resistance simulation. The TVqc model relies on a quantum correction potential retaining the CBE near the Schottky interface while avoiding non-local mesh and WKB computation for direct tunneling treatment. The TVqc model can be implemented into the DD solver in a straightforward manner. For typical IV characteristic simulations, the TVqc method is faster than the NLT method by 3-4 times while the accuracy remains unchanged.

Paper 4.4 (ID: 118)

2:30PM-2:50PM

AC Quantum Transport Simulation Including Electron-Phonon Scattering

*Phil-Hun Ahn (Gwangju Institute of Science and Technology) and Sung-Min Hong
(Gwangju Institute of Science and Technology)*

Abstract

For the first time, we report the small-signal (AC) nonequilibrium Green function (NEGF) simulation results for an extremely scaled MOSFET, including the electron-phonon scattering. In this work, both the AC Poisson equation and the AC NEGF equations are consistently considered by solving a coupled system of equations. The conservation of the AC currents is checked.

Paper 4.5 (ID: 59)

2:50PM-3:10PM

Electron-Electron Scattering in Non-Parabolic Transport Models

Josef Gull (TU Vienna, Institute for Microelectronics), Lado Filipovic (TU Vienna, Institute for Microelectronics) and Hans Kosina (TU Vienna, Institute for Microelectronics)

Abstract

A two-particle Monte Carlo (MC) algorithm has been developed recently which treats electron-electron scattering (EES) as an ordinary scattering mechanism. In this work, we present the extension of the algorithm to non-parabolic bands, and discuss a statistical enhancement algorithm.

Thu, September 26th

Breakout Session 5 | Ferroelectric Modeling**Grand Ballroom | 10:10AM-12:00PM****Invited Talk**

10:10AM-10:40AM

A TCAD to SPICE Simulation Framework for Analysis of Device to Circuit BTI and HCD Aging

Payel Chatterjee, Karansingh Thakor and Souvik Mahapatra

Paper 5.1 (ID: 32)

10:40AM-11:00AM

Memory Window and Variability Modeling of Multi-Domain Al:HfO₂ Ferroelectric NAND Memory

Kuan-Hung Liu (Synopsys Taiwan), Tue Gunst (Synopsys Denmark), Ko-Hsin Lee (Synopsys Taiwan), Anders Blom (Synopsys Inc.) and Xi-Wei Lin (Synopsys Inc.)

Abstract

This paper presents simulation of a three-dimensional ferroelectric NAND memory using a multi-domain Ginzburg–Landau–Khalatnikov polarization model. The model parameters with a variation range following a Gaussian

function are calibrated based on experimental polarization-electric field hysteresis for undoped and 5 mol% Al-doped HfO₂ thin films. The allowed memory window between program and erase states can be enlarged from 2.9 to 12.6V through the incorporation of Al dopant in HfO₂. This polarization enhancement by substituting Hf with Al atom is also justified through atomistic simulation.

Paper 5.2 (ID: 69)

11:00AM-11:20AM

First-Principles Calculations of Non-Equilibrium Energetics and Polarization Switching in Oxide Ferroelectric Tunnel Junctions

Kaptansinh Rajput (Korea Advanced Institute of Science and Technology (KAIST)), Ryong Gyu Lee (Korea Advanced Institute of Science and Technology (KAIST)), Tae Hyung Kim (Korea Advanced Institute of Science and Technology (KAIST)), Hyeonwoo Yeo (Korea Advanced Institute of Science and Technology (KAIST)) and Yong-Hoon Kim (Korea Advanced Institute of Science and Technology (KAIST))

Abstract

Ferroelectric tunnel junction (FTJ) is a promising candidate for future memory technologies and much effort has been put into the understandings of its materials and device properties. However, in view of atomistic first-principles calculations, most studies have been so far limited to the equilibrium limit and the behavior of FTJs under non-equilibrium conditions remains largely unexplored. Herein, we describe the first-principles framework that enables the analysis of FTJs under non-equilibrium conditions, which is based on the multi-space constrained-search density functional theory (MS-DFT) formalism we have developed over the years. The unique strength of MS-DFT is that the non-equilibrium free energy as well as electric field-dependent polarization and capacitance can be obtained in a first-principles manner. As an application example, for a representative SrRuO₃-BaTiO₃-SrRuO₃ (SRO-BTO-SRO) FTJ capacitor model, we compute the current density-voltage characteristics and tunneling electro-resistance, and the impact of polarization orientation on the resistance state.

Paper 5.3 (ID: 36)

11:20AM-11:40AM

Advanced Ferroelectric Modeling for BEOL Negative Capacitance Nanoelectromechanical Switches

Collin Finnan (Electrical Engineering and Computer Science Department, University of California, Berkeley), Lars Tatum (Electrical Engineering and Computer Science Department, University of California, Berkeley) and Tsu-Jae King Liu (Electrical Engineering and Computer Science Department, University of California, Berkeley)

Abstract

Negative capacitance (NC) has been proposed as a means of reducing the pull-in voltage of a nano-electro-mechanical (NEM) switch without physically scaling the device. Existing NC NEM analyses model ferroelectrics assuming a single-domain; however, real devices have multiple antiparallel domains. This work presents a two-dimensional simulation framework for NC NEM switches using two contemporary multi-domain modeling techniques of ferroelectric hafnium zirconium oxide. Though single-domain ferroelectric models result in a dramatic reduction in pull-in voltage, multi-domain models within the same system either do not exhibit NC, or only exhibit limited benefit from the NC effect.

Paper 5.4 (ID: 102)

11:40AM-12:00PM

Revealing the Noise Dependent Sensitivity of a Junctionless FinFET-based Hydrogen Sensor with Ferroelectric Gate Stack

Navneet Gandhi (PDPM Indian Institute of Information Technology Design and Manufacturing Jabalpur), Sunil Rathore (PDPM Indian Institute of Information Technology Design and Manufacturing Jabalpur), Rajeewa Kumar Jaisawal (PDPM Indian Institute of Information Technology Design and Manufacturing Jabalpur), P N Kondekar (PDPM Indian Institute of Information Technology Design and Manufacturing Jabalpur), Naveen Kumar (University of Glasgow), Ankit Dixit (University of Glasgow), Vihar Georgiev (University of Glasgow) and Navjeet Bagga (Indian Institute of Technology Bhubaneswar)

Abstract

This paper presents simulation of a three-dimensional ferroelectric NAND memory using a multi-domain Ginzburg–Landau–Khalatnikov polarization model. The model parameters with a variation range following a Gaussian function are calibrated based on experimental polarization-electric field hysteresis for undoped and 5 mol% Al-doped HfO₂ thin films. The allowed memory window between program and erase states can be enlarged from 2.9 to 12.6V through the incorporation of Al dopant in HfO₂. This polarization enhancement by substituting Hf with Al atom is also justified through atomistic simulation.

**Breakout Session 6 |
Sensors & Optoelectron****Sainte Claire Ballroom | 10:10AM-12:00PM****Invited Talk**

10:10AM-10:40AM

**Approaches to Simulating Meta-surfaces for Flat Optical Devices:
The Transition to Solutions Based on Neural Networks**

Denis Rideau, Mathys Le Grand, Loumi Tremas, Louis Henri Fernandez-Mouron, Valerie Serradeil, Damien Maitre, Bruce Ray, James Downing, Pascal Urard, Habib Mohamad and Enrico Carnemolla

Paper 6.1 (ID: 33)**Impact of Ion Energy and Yield in Oblique Ion Beam Etching Process
for Blazed Gratings**

10:40AM-11:00AM

Tobias Reiter (TU Wien, Institute for Microelectronics), Alexander Toifl (Silvaco Europe Ltd.), Sung Won Kong (Silvaco Inc.), Andreas Hössinger (Silvaco Europe Ltd.) and Lado Filipovic (TU Wien, Institute for Microelectronics)

Abstract

We present a model for oblique ion beam etching (IBE) processes which are applied in the fabrication of optoelectronic devices, such as blazed gratings. Our model combines top-down Monte Carlo flux calculation and the Level-Set method to accurately capture the intricate etch profile evolution during the IBE process. We demonstrate the capability of our model by reproducing experimental etch profiles presented by Zhang et al. Furthermore, we study the impact of ion energy and yield on the time evolution of etch profiles, highlighting their crucial roles in shaping the final device geometries.

11:00AM-11:20AM

Paper 6.2 (ID: 57)**Understanding the dynamic perturbative behaviour of Electrolyte-Gated FET based Biosensor with Immobilized Nanoparticles**

Naveen Kumar (University of Glasgow), César Pascual García (Luxembourg Institute of Science and Technology),
Ankit Dixit (University of Glasgow) and Vihar Georgiev (University of Glasgow)

Abstract

In this study, we introduce a novel methodology to investigate and model the nonlinear perturbative behavior in Electrolyte-Gated Field-Effect Transistor (EGFET) based biosensors that are enhanced with immobilized nanoparticles. Our approach systematically addresses the perturbations due to redundant silanol sites by quantifying their impact on sensor output, thereby improving the reliability of the sensor readings. Additionally, we explore the role

11:20AM-11:40AM

Paper 6.3 (ID: 11)**Atomistic analysis on random telegraph noise of source follower transistors in sub-micrometer CIS pixels**

Jae Ho Kim (Samsung Electronics), Sungchul Kim (Samsung Electronics), Hong-Lae Park (Samsung Electronics),
Gijae Kang (Samsung Electronics), Seonghoon Ko (Samsung Electronics), Jongsu Yoon (Samsung Electronics),
Wook Lee (Samsung Electronics), Yonghee Park (Samsung Electronics), Jonghyun Go (Samsung Electronics),
Hyunchul Kim (Samsung Electronics) and Dae Sin Kim (Samsung Electronics)

Abstract

Physical modeling of random telegraph noise (RTN) on L-shaped source follower (SF) transistors in 0.5 μm CMOS image sensor (CIS) pixels is conducted, considering discretized traps at the Si/SiO₂ interface using density functional theory (DFT). Investigation of the image signal spectrum caused by RTN via measurement are performed. Additionally, the origins of the effect of Fluorine implantation (F-IIP) passivation in the image sensor are discussed from an atomistic perspective.

Paper 6.4 (ID: 100)**Modeling Next Generation Sensor Chips: Towards Predictive Band Structure Models for Quarternary III-V Semiconductor Alloys**

11:40AM-12:00PM

Angus Gentles (ams-OSRAM), Mohammed Dehghani (Technical University of Vienna), Rainer Minixhofer (ams-OSRAM),
Pedram Khakbaz (Technical University of Vienna), Dominic Waldhoer (Technical University of Vienna) and Michael Waltl
(Technical University of Vienna)

Abstract

In this work, an ab initio scheme based on the DFT+U method is presented to model the electronic structure of ternary/quaternary semiconductor alloys. Within this method, optimal sets of Hubbard-U parameters are found for each binary compound of the alloy using a Bayesian optimization scheme. We introduce two interpolation schemes for the U parameters to describe the electronic structure in alloy supercells. By applying them on InGaAsSb we show that their predicted bandgap bowing is much closer to experimental data compared to results based on the virtual crystal approximation. The two schemes are shown to predict almost identical electronic bandgaps and provide a computationally efficient alternative to other approaches like the use of hybrid functionals.

of neutral gold nanoparticles in augmenting the sensor's ability to detect and differentiate amino acid fingerprints effectively. Moreover, our research delves into the effects of random partial hybridization of carboxylic acids (amino acids) under varying conditions, which alter the reactive sites available for binding. By integrating these factors into our analysis, we provide a robust framework for calibrating and benchmarking experimental data.

Breakout Session 7 | Memory

Grand Ballroom | 1:00PM-3:00PM

Paper 7.1 (ID: 41)

1:00PM-1:20PM

A Multiscale Simulation Approach for Program Noise and Cross-temperature Effects in 3D NANDs

Keng-Hua Lin (Synopsys), Salvatore Maria Amoroso (Synopsys), Po-Chou Chen (Synopsys), Yueh-Ying Tseng (Synopsys), Andrew Robert Brown (Synopsys), Plamen Asenov (Synopsys), Ulrik Vej-Hansen (Synopsys), Xi-Wei Lin (Synopsys), Victor Moroz (Synopsys), Chih-Chiang Wang (Synopsys) and Anders Blom (Synopsys)

Abstract

NAND technology keeps reaching unprecedented levels of bit density, mainly thanks to 3D stacking – with most players delivering today more than 200 layers in a four-bit-per-cell technology. With densities of billions of cells per chip, variability from both process variations and intrinsic statistical variations becomes a fundamental design concern. Moreover, the polysilicon channel material adopted in 3D NANDs adds new reliability aspects to the cross-temperature effect. This issue appears when the NAND memory is read at a different temperature from that at which it was programmed. This was previously known in 2D NANDs, but 3D NANDs exacerbate this effect because the polysilicon trap occupancy (and the associated variability) is modulated by the temperature. Numerical simulation is a powerful tool to investigate such phenomena. However, the variability response to temperature depends on the trap energy distributions in the polysilicon bandgap, which is typically approximated by empirical distributions and calibrated to hardware data. In this paper, for the first time to the best of our knowledge, we obtain a deeper physics-based understanding of polysilicon grain boundaries and its defects by ab-initio simulations. We then use ab-initio-calculated trap properties to inform 3D TCAD, paving the path to a multiscale approach to the statistical simulation of 3D NAND cells.

Paper 7.2 (ID: 119)

1:20PM-1:40PM

Modeling the Operation of Charge Trap Flash Memory: A Monte Carlo Approach to Carrier Distribution and (De)Trapping

Thomas Hellemans (imec + KU Leuven), Devin Verreck (imec), Antonio Arreghini (imec), Geert Van den Bosch (imec), Maarten Rosmeulen (imec), Michel Houssa (KU Leuven + imec) and Jan Van Houdt (imec + KU Leuven)

Abstract

We propose a Monte Carlo framework including (de)trapping to describe the non-equilibrium operation of charge trap flash memories. We thereby base the empirical carrier distribution that was proposed in recent studies on physical parameters. After an outline of the simulation procedure, we show how carrier trapping and detrapping is included. Finally, we illustrate the simulators' capabilities via simulations of the programming and retention operations, highlighting the insight into the carrier dynamics that this approach enables.

Paper 7.3 (ID: 24)

1:40PM-2:00PM

D2D Variation Aware DTCO for Novel Vertical a-IGZO-FETs in Large-Scale M3D 2T0C DRAM Bit Cell Evaluation via Statistical Modeling Methodology

Yue Zhao (Institute of Microelectronics of the Chinese Academy of Sciences), Yong Yu (Beijing Superstring Academy of Memory Technology), Jingrui Guo (Institute of Microelectronics of the Chinese Academy of Sciences), Lingfei Wang (Institute of Microelectronics of the Chinese Academy of Sciences), Nan Yang (Beijing Superstring Academy of Memory Technology), Jianpeng Jiang (Beijing Superstring Academy of Memory Technology), Yanan Lu (Beijing Superstring Academy of Memory Technology), Menglong Zhou (Beijing Superstring Academy of Memory Technology), Shijie Huang (Institute of Microelectronics of the Chinese Academy of Sciences), Lihua Xu (Institute of Microelectronics of the Chinese Academy of Sciences), Zhenhua Wu (Institute of Microelectronics of the Chinese Academy of Sciences), Guanhua Yang (Institute of Microelectronics of the Chinese Academy of Sciences), Di Geng (Institute of Microelectronics of the Chinese Academy of Sciences), Guilei Wang (Beijing Superstring Academy of Memory Technology), Bryan Kang (Beijing Superstring Academy of Memory Technology), Chao Zhao (Beijing Superstring Academy of Memory Technology), Ling Li (Institute of Microelectronics of the Chinese Academy of Sciences) and Ming Liu (Institute of Microelectronics of the Chinese Academy of Sciences).

Abstract

Device nonuniformity of ultra-scaled novel vertical a-IGZO-FETs is induced by multi-sources, such as dimension variation and material disorder, limiting large-scale DRAM design. Particularly, fluctuation of disorders in an amorphous channel exhibits a great impact on density of states (DOS) contributing to statistical effects on gate controllability and transport mechanisms. To clarify this issue, TCAD simulations are conducted by adjusting geometric dimensions and DOS, and corresponding statistical characteristics (e.g., on-voltage and on-current etc.) are extracted from up to 80 samples of down to channel length of 50nm. Such effects are further incorporated into a surface-potential based physics compact model via calibration to experiments. Using this model, the vertical a-IGZO-FET-based 2T0C DRAM is firstly investigated with the statistical analysis of Write/Read performances, supporting device variation aware DTCO flow of future extremely large-scale and high-density M3D memory.

Paper 7.4 (ID: 09)

2:00PM-2:20PM

Modeling Row Hammer Effect in 3D Capacitor-less DRAM using Triple-Gated Silicon Nanosheet Device.

Jimin Son (Pukyong National University), Jun Young Park (Pukyong National University), Taeun Lee (Pukyong National University), Sola Woo (Pukyong National University) and Shimeng Yu (Georgia Institute of Technology)

Abstract

A monolithically stackable 3D capacitor-less DRAM structure using triple-gated silicon nanosheet device is demonstrated using TCAD simulation. Our proposed device exhibits a low programming voltage of 1.8 V, a high current sense margin of 78 μ A, a fast speed of 5 ns and a data retention time of more than 10⁴ s. In addition, we evaluate the row hammer effect on the 3D array level, including program, erase, read, and hold operations. The simulation results show a robust storage node potential despite repeated attack operations from the neighboring cell.

Paper 7.5 (ID: 22)

2:20PM-2:40PM

Electrical TCAD Simulation of STT-MRAMs

Hanane Chems Saifi (Aix-Marseille Univ, CNRS, IM2NP), Jérémy Postel-Pellerin (Aix-Marseille Univ, CNRS, IM2NP), Nicole Yazigy (Aix-Marseille Univ, CNRS, IM2NP), Noémie Couzi (Aix-Marseille Univ, CNRS, IM2NP), Vincenzo Della Marca (Aix-Marseille Univ, CNRS, IM2NP), Pierre Canet (Aix-Marseille Univ, CNRS, IM2NP), Nuno Caçoilo (SPINTEC, University Grenoble Alpes, CNRS, CEA-SPINTEC, CEA), Grégory Di Pendina (SPINTEC, University Grenoble Alpes, CNRS, CEA-SPINTEC, CEA) and Ricardo C. Sousa (SPINTEC, University Grenoble Alpes, CNRS, CEA-SPINTEC, CEA)

Abstract

In this paper, we propose to develop a full TCAD simulation, using a commercial tool (Sentaurus), of an STT-MRAM device to better understand its electrical behavior. To our knowledge, it is the first time that a simulated I-V hysteresis loop is calibrated on experimental data. The impact of several key parameters is presented, and the obtained values are in good agreement with the ones found in literature. This calibrated TCAD simulation can then be used to study the variability of the switching voltages and the impact of process variations.

**Breakout Session 8 |
Machine Learning/AI Based Modeling****Sainte Claire Ballroom | 1:00PM-3:00PM**

1:00PM-1:20PM

Paper 8.1 (ID: 94)**STEM Image Based Structure Generation for Advanced CMOS Devices**

Felix Widauer (Global TCAD Solutions GmbH), Xaver Klemenschits (Global TCAD Solutions GmbH), Cedrik Balla (Global TCAD Solutions GmbH), Gerhard Rzepa (Global TCAD Solutions GmbH), Jose Maria Gonzalez-Medina (Global TCAD Solutions GmbH), Bonny Dongre (Global TCAD Solutions GmbH), Georg Strof (Global TCAD Solutions GmbH), Zlatan Stanojevic (Global TCAD Solutions GmbH) and Markus Karner (Global TCAD Solutions GmbH)

Abstract

Process technology computer aided design (TCAD) has become an indispensable tool to characterize proposed technologies, however current solutions often require tedious manual calibrations of process flows. Here, we present the automatic processing of electron microscopy (EM) images to 2D and 3D device representations. Parts of the device which are not present in the EM image are emulated to create a structure ready for device simulation. The feasibility of this approach is shown by extracting the fin shape from the EM image of a 7 nm FinFET, as well as studying the impact of fin shape on device characteristics in an exemplary variability study. Additionally, the inner spacers and gate shape of a nanosheet (NS) FET are reproduced, showcasing the versatility of the presented approach.

Paper 8.2 (ID: 97)

1:20PM-1:40PM

**Equipment-Informed Machine Learning-Assisted Feature-Scale
Plasma Etching Model**

Lado Filipovic (CDL for ProMod at the Insitute for Microelectronics, Technische Universität Wien), Tobias Reiter (CDL for ProMod at the Insitute for Microelectronics, Technische Universität Wien), Julius Piso (Insitute for Microelectronics, Technische Universität Wien) and Roman Kostal (Insitute for Microelectronics, Technische Universität Wien).

Abstract

We investigate means to merge feature-scale and reactor-scale models during plasma etching using machine

learning (ML) and interpolative approaches. First, we test the SF6/O2 plasma etching models based on a small dataset from literature. We find that Gaussian process regression (GPR) leads to significant over-fitting, resulting in waviness in the predicted values in the range where no data is available. A neural network (NN) model was likewise implemented with rectified linear unit activation. This model provides linear prediction between known values, resulting in a better qualitative fit to experimental observations. Finally, we perform about 19,000 chamber simulations of a Cl2/Ar plasma while varying relevant input parameters. The data is used to build an interpolative model of the chamber and provide a means to quickly extract relevant fluxes for the feature-scale model

Paper 8.3 (ID: 27)

1:40PM-2:00PM

A SPICE-compatible Neural Network Compact Model for Efficient IC Simulations*Chien-Ting Tung (UC Berkeley), Sayeef Salahuddin (UC Berkeley) and Chenming Hu (UC Berkeley)***Abstract**

We present a SPICE-compatible neural-network-based compact model for advanced FETs. The model consists of an IV and QV network which have all terminal currents and charges and includes geometry dependence. The study of the activation functions is conducted to find the most efficient function for circuit simulations. The model is then implemented in Verilog-A with direct multiplication instead of loops to enhance the computational speed. We demonstrate and benchmark the neural network model performance in large circuit simulations with different network structures. It shows about 40 times speed improvement compared to the conventional compact model.

Paper 8.4 (ID: 75)

2:00PM-2:20PM

FuncAnoDe: A Function Level Anomaly Detection in Device Simulation*Tae Il Oh (Alsemy Inc.), Hong Chul Nam (Alsemy Inc., ETH Zurich), Chanwoo Park (Alsemy Inc.), and Hyunbo Cho (Alsemy Inc.)***Abstract**

In semiconductor device simulations, the reliance on empirical compact models, such as the Berkeley Short-channel IGFET Model (BSIM) and neural compact models, introduces approximations that may significantly diverge from actual physical phenomena. Identifying and filtering out unphysical behaviors and erroneous simulation outcomes is a challenging task, traditionally requiring extensive expert involvement and incurring high costs. In response, we introduce FuncAnoDe, a deep learning network for unsupervised functional anomaly detection in semiconductor simulation datasets. FuncAnoDe is the first to offer deep learning based function-level anomaly detection without the need for manual expert intervention. Its function-level encoder decoder architecture enables application across a diverse range of device parameters and simulations, ensuring scalability and high accuracy in identifying physically implausible parameter configurations. Our evaluations conducted through complex capacitance-voltage (C-V) curve analysis, confirming FuncAnoDe's effectiveness in anomaly detection, achieving a 100.00% accuracy rate without reliance on manual labeling. FuncAnoDe's contribution is in providing a methodological advancement that enhances the precision, reliability, and efficiency of semiconductor design and simulation workflows.

Paper 8.5 (ID: 34)

2:20PM-2:40PM

TCAD Structure Input File Generation Using Large Language Model

*Le Minh Long Nguyen (San Jose State University), Albert Lu (San Jose State University),
and Hiu Yung Wong (San Jose State University)*

Abstract

Large Language Models (LLMs) such as ChatGPT have been revolutionizing various fields from education to medicine. LLMs are machine learning models trained on vast amounts of text data from the Web and are designed to understand, generate, and interact with humans through natural languages such as English. TCAD, as a sophisticated engineering tool, usually requires a significant amount of expertise from the engineers to set up an appropriate structure. It is thus desirable to train LLMs which can generate input files for structure generation based on natural languages. However, unlike programming languages such as Python which have abundant training examples on the Web, TCAD examples are scarce. In this work, using TCAD Sentaurus Structure Editor (SSE) as an example, 2000 nanowire data are generated to fine-tune Llama 2 (an open-source LLM developed by Meta [1]) to obtain a chatbot that can generate an SSE input file for a nanowire with 18 parameters with English as an instruction. Structures are then created using SSE to verify the correctness of the input files. It should be noted that although the chatbot is limited to nanowire generation, only 2k training data is required (note that 218 ~ 262k already if a full factorial design of experiment is needed) and it responds accurately to English not seen in the training data. This demonstrates a huge potential to use LLM in TCAD input file generation when more sophisticated fine-tuning data and computing resources are available and the importance of the pre-training Web data.

Fri, September 27th

**Breakout Session II |
Advanced CMOS Logic****Grand Ballroom | 9:00AM-10:30AM****Invited Talk**

9:00AM-9:30AM

Advances in Modeling of Interconnect Materials

Blanka Magyari-Kope and Jeff Wu

Paper 11.1 (ID: 29)

9:30AM-9:50AM

**Atomistic Multiscale Simulation-Based Extraction of Design Margins in
Advanced Transistor Architectures**

*Jun Jung (CSE Team, Innovation Center, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si, Gyeonggi-do, Korea),
Geunsang Yoo (CSE Team, Innovation Center, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si, Gyeonggi-do,
Korea), Alexander Schmidt (CSE Team, Innovation Center, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si,
Gyeonggi-do, Korea), Wonyup Song (CSE Team, Innovation Center, Samsung Electronics, 1, Samsungjeonja-ro,
Hwaseong-si, Gyeonggi-do, Korea), Hiroyuki Kubotera (TCAD-lab, Samsung Semiconductor Inc. 3655 N 1st street, San
Jose, CA 95134, United States), Muralikrishna Raju (TCAD-lab, Samsung Semiconductor Inc. 3655 N 1st street, San Jose,
CA 95134, United States), Byoung-hak Lee (TCAD-lab, Samsung Semiconductor Inc. 3655 N 1st street, San Jose, CA
95134, United States), Woosung Choi (TCAD-lab, Samsung Semiconductor Inc. 3655 N 1st street, San Jose, CA 95134,
United States), Anthony Payet (Process TCAD Lab, Samsung DSRJ, Yokohama Mitsui Building, 1-1-2, Takashima, Nishi-ku,*

Yokohama-shi, Kanagawa, Japan), Hiroo Koshimoto (Process TCAD Lab, Samsung DSRJ, Yokohama Mitsui Building, 1-1-2, Takashima, Nishi-ku, Yokohama-shi, Kanagawa, Japan), Yasuyuki Kayama (Process TCAD Lab, Samsung DSRJ, Yokohama Mitsui Building, 1-1-2, Takashima, Nishi-ku, Yokohama-shi, Kanagawa, Japan), Beom Seo Kim (DRAM PA2, Memory, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si, Gyeonggi-do, Korea), Chungyeon Lee (DRAM Process Development, Memory, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si, Gyeonggi-do, Korea), Jamin Koo (DRAM Process Development, Memory, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si, Gyeonggi-do, Korea), Joohyun Jeon (CSE Team, Innovation Center, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si, Gyeonggi-do, Korea), Seungmin Lee (CSE Team, Innovation Center, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si, Gyeonggi-do, Korea) and Dae Sin Kim (CSE Team, Innovation Center, Samsung Electronics, 1, Samsungjeonja-ro, Hwaseong-si, Gyeonggi-do, Korea).

Abstract

Employing Kinetic Monte Carlo (KMC) method for epitaxy simulation reinforced with Molecular Dynamics for KMC model parameter extraction, this study establishes an approach for determining design margins in transistor architectures characterized by high aspect ratio cavities. This integrated atomistic and multiscale simulation framework allows prediction of the epitaxy quality and potential defects as well as the optimization of key design parameters.

Paper 11.2 (ID: 110)

9:50AM-10:10AM

Characteristic Variability of GAA Si NS CFETs Induced by Process Variation Effect and Intrinsic Parameter Fluctuation

Min-Hui Chuang (National Yang Ming Chiao Tung University), Sekhar Reddy Kola (National Yang Ming Chiao Tung University) and Yiming Li (Department of Electrical Engineering, National Chiao-Tung University, 1001 Ta Hsueh Road, Hsinchu 300, Taiwan)

Abstract

We simultaneously estimate the impact of process variation effect (PVE) including three major variation factors and intrinsic parameter fluctuation (IPF) including two key random sources on electrical characteristics of gate-all-around silicon nanosheet complementary field-effect transistors (GAA Si NS CFETs). The combined influence of PVE and IPF on both N-/P-FETs in GAA Si NS CFETs results in significant fluctuation of the I_{on} -state current. This variability to PVE factors is particularly pronounced in the P-type device due to the parasitic nature of its bottom channel. Furthermore, compared with the magnitudes of dynamic and short circuit powers, the static power is marginal, but it possesses the largest fluctuation (about RSD of 82%). Notably, the statistical sum of each factors of fluctuation overestimates the total variability owing to ignoring the correlation effects among all random factors, compared with the estimation at the same time.

Paper 11.3 (ID: 107)

10:10AM-10:30AM

Hierarchical Transport Modeling for Path-Finding DTCO

Lee-Chi Hung (Global TCAD Solutions GmbH), Gerhard Rzepa (Global TCAD Solutions GmbH), Markus Kampl (Global TCAD Solutions GmbH), Chen-Ming Tsai (Global TCAD Solutions GmbH), Franz Schanovsky (Global TCAD Solutions GmbH), Oskar Baumgartner (Global TCAD Solutions GmbH), Zlatan Stanojević (Global TCAD Solutions GmbH) and Markus Karner (Global TCAD Solutions GmbH)

Abstract

We present a hierarchical flow for predictive TCAD device simulation in DTCO applications. Using a thoroughly calibrated

sub-band Boltzmann transport equation (SBTE) solver, TCAD device simulation parameters for the technology under investigation are generated automatically. This flow enables predictive accuracy of the SBTE solver at turn-around-times of SPICE simulations. It is demonstrated here for an A14 nanosheet technology, i) showing all intermediate calibration details and ii) highlighting a considerable improvement in the accuracy of ring-oscillator performance.

Breakout Session 12 | Quantum Computing

Sainte Claire Ballroom | 9:00AM-10:30AM

Invited Talk

9:00AM-9:30AM

Hierarchical simulation of monolithic CFETs using atomistic and continuum models

Woosung Choi, Hyeon-Kyun Noh, Hong-Hyun Park, Anh-Tuan Pham, Seonghoon Jin, Byounghak Lee, Chihak Ahn, Hiroyuki Kubotera and Dae Sin Kim

Paper 12.1 (ID: 112)

9:30AM-9:50AM

Simulation of qubits confined in pseudo magnetic field generated by strained graphene nanoribbon

Yusuke Hayashi (Department of Electrical and Electronic Engineering, Kobe University) and Satofumi Souma (Department of Electrical and Electronic Engineering, Kobe University)

Abstract

We propose a quantum dot device with a pseudo magnetic field generated by strained graphene nanoribbon. The ripple of graphene nanoribbon generates the strong pseudo magnetic field with large undulation. We find the Landau levels are formed in the pseudo magnetic field and the double quantum dot is created with the energy difference of tens of meV. The result implies that the tunnel coupling of the double quantum dot can be possibly controlled via the variation of the strain.

Paper 12.2 (ID: 62)

9:50AM-10:10AM

Rapid Simulation Framework for Superconducting Qubit Readout System Inverse Design and Optimization

Albert Lu (San Jose State University) and Hiu Yung Wong (San Jose State University)

Abstract

Qubit readout is one of the most important operations in quantum computers. In superconducting quantum computers, the success of readout depends on many parameters and is difficult to optimize due to the high dimensionality of the problem. In this work, a rapid simulation framework that comprises an analytical model, a neural network (NN), and optimizers using the NN as a surrogate model is proposed. The analytical model is calibrated to the experimental result and allows rapid simulations to generate enough data to train NNs. Single and multi-objective optimizations are performed. It is shown that a better solution can be found using the optimizer than human optimization. Moreover, the framework can find designs with out-of-the-training-range parameters.

Paper 12.3 (ID: 88)

10:10AM-10:30AM

Study of Using Variational Quantum Linear Solver for Poisson Equation*Nithin Reddy Govindugar (San Jose State University) and Hiu Yung Wong (San Jose State University)***Abstract**

Quantum computing is promising in speeding up the system of linear equations (SLE) solving process. However, its performance is limited by noise. The variational quantum linear solver (VQLS) algorithm is expected to be more resilient to noise than gate-based quantum computing algorithms. This is because error correction is not available yet and VQLS is based on cost function minimization. In this paper, the gate insulator Poisson equation is solved using VQLS. The results are compared to technology computer-aided design (TCAD) results and gate-based quantum algorithm results. We show that, even without error-free qubits, the IBM-Q quantum computer hardware can solve a 2-variable SLE with high fidelity. We further demonstrate that, through VQLS simulation, an 8-variable SLE can be solved with fidelity as high as 0.96.

**Breakout Session 9 |
Planar CMOS Technology****Grand Ballroom | 10:50AM-11:50AM****Paper 9.1 (ID: 90)**

10:50AM-11:10AM

Modeling and Understanding Threshold Voltage and Subthreshold Swing in Ultrathin Channel Oxide Semiconductor Transistors*Koustav Jana (Stanford University), Shuhan Liu (Stanford University), Kasidit Toprasertpong (University of Tokyo), Qi Jiang (Stanford University), Sumaiya Wahid (Stanford University), Jimin Kang (Stanford University), Jian Chen (Stanford University), Eric Pop (Stanford University) and H.-S. Philip Wong (Stanford University)***Abstract**

We present a physics-based model for ultrathin channel oxide semiconductor field-effect transistors (OSFETs) which successfully incorporates and explains several important OSFET physics: (1) threshold voltage dependence on OSFET device parameters such as channel thickness, gate dielectric capacitance, and gate metal work function, and OS material parameters such as electron affinity and channel doping, (2) impact of trap-like localized states due to the amorphous nature of the OS, (3) effect of sub-gap Gaussian states from oxygen vacancies and other point defects, and (4) the importance of enhancing gate control to alleviate the effect of traps on the subthreshold swing and threshold voltage.

Paper 9.2 (ID: 105)

11:10AM-11:30AM

Cryogenic Modeling of 22nm FDSOI MOSFET*Yihong Qing (ADVISE, KU Leuven, Belgium), Jinghao Zhao (ADVISE, KU Leuven, Belgium), Valentijn De Smedt (ADVISE, KU Leuven, Belgium) and Jeffrey Prinz (ADVISE, KU Leuven, Belgium)***Abstract**

In this work, we introduce a TCAD modeling approach for 22nm ultra-thin body and buried oxide fully depleted silicon on insulator (UTBB-FDSOI) MOSFETs, tailored to operate at cryogenic temperatures ranging from 300 K down to 4.5 K. Incorporating relevant physical effects, this TCAD model is calibrated using experimental data from a test chip.

On-chip bootstrapping is employed to mitigate leakage currents from the device test arrays, ensuring precise low current measurements (in the order of a few nA). Our results provide insight in the behaviour of the threshold voltage, subthreshold swing, and back gate bias effect at cryogenic temperatures, offering valuable guidance for low-power circuits and quantum computing read-out IC design.

Paper 9.3 (ID: 83)

11:30AM-11:50AM

Improved Compact Modeling of Snapback Behaviour in ESD MOSFETs

Anant Singhal (Indian Institute of Technology Jodhpur), Garima Gill (Indian Institute of Technology Jodhpur), Avinash Lahgere (Indian Institute of Technology Kanpur), Girish Pahwa (International College of Semiconductor Technology, National Yang Ming Chiao Tung University) and Harshit Agarwal (Indian Institute of Technology Jodhpur)

Abstract

In this work, we present an improved physics-based ESD compact model to capture the snapback triggering voltage (V_{t1}) and the snapback triggering current (I_{t1}) which defines the on-set of the ESD protection device. The proposed model is designed to capture snapback behavior in both MOSFETs and HV-MOSFETs, without relying on parameters extracted solely from measurement data. The proposed model is successfully validated through extensive TCAD simulations and experimental data for HV-MOSFETs. The proposed model is simple and can be easily integrated with industry standard compact models.

// Anant Singhal and Garima Gill have equally contributed for this work which has been highlighted in the manuscript.

**Breakout Session 10 |
Chip-Level & Packaging Modeling****Sainte Claire Ballroom | 10:50AM-11:50AM****Paper 10.1 (ID: 13)**

10:50AM-11:10AM

Full Chip Stress Model for Defect Formation Risk Analysis in Multilayer Structures

Kyungmi Yeom (Samsung Electronics), Geunsang Yoo (Samsung Electronics), Alexander Schmidt (Samsung Electronics), Anthony Payet (Samsung DSRJ), Yutaka Nishizawa (Samsung DSRJ), Masaru Uchiyama (Samsung DSRJ), Yasuyuki Kayama (Samsung Electronics), Chihak Ahn (Samsung Semiconductor Inc), Woosung Choi (Samsung Semiconductor Inc), Joohyun Jeon (Samsung Electronics), Seungmin Lee (Samsung Electronics) and Dae Sin Kim (Samsung Electronics)

Abstract

To overcome the limitations of the previously developed stress simulation method for full-chip scale [1], which could only analyze a single layer of metallization due to its use of a shell element method, a simulation flow that can handle multiple layers was developed. Introducing stress simulation during the incremental formation of the back-end-of-line (BEOL) structure is crucial for predicting the risk of stress-induced defects not just on the surface, but throughout the entire 3D structure, including the chance of defects between metallization layers. To enhance the predictive capability for the larger-scale stress-induced defects, local stress averaging was utilized to balance simulation accuracy with coverage area. This methodology allowed for the expansion of the simulation domain beyond the chip level, thereby enabling the estimation of layout-induced deformations on a wafer scale.

Paper 10.2 (ID: 18)

11:10AM-11:30AM

Self-consistent tiling method for the chip-scale stress simulation

Chihak Ahn (Samsung semiconductor Inc.), Kyungmi Yeom (Samsung Electronics), Alexander Schmidt (Samsung Electronics), Yutaka Nishizawa (Samsung Device solutions R&D Japan), Anthony Payet (Samsung Device solutions R&D Japan), Seonghoon Jin (Samsung Semiconductor Inc.), Yasuyuki Kayama (Samsung Device solutions R&D Japan), Woosung Choi (Samsung Semiconductor Inc.) and Dae Sin Kim (Samsung Electronics)

Abstract

We present a self-consistent boundary treatment method to account for the long-range stress effects in chip-scale stress simulations. The long range effects are superposed onto the stress solution of the individual tiles as the boundary displacements in a self-consistent manner. The model concept is rigorously tested and applied to a realistic example to demonstrate large-scale simulation capability. Chip-scale and even wafer-scale simulations can be achieved by the nested application of the proposed method. An important potential application would be mask design improvement to avoid stress-related device failure.

Paper 10.3 (ID: 30)

11:30AM-11:50AM

3D Electromagnetic simulation and modeling for DTCO of decoupling high-density capacitor in silicon interposer for HPC applications

Hélène Jacquinet (Univ. Grenoble Alpes, CEA, LETI F-38000 Grenoble, France), Emmanuel Pluchart (Univ. Grenoble Alpes, CEA, LETI F-38000 Grenoble, France), Frédéric Rothan (Univ. Grenoble Alpes, CEA, LETI F-38000 Grenoble, France), Sébastien Martinie (Univ. Grenoble Alpes, CEA, LETI F-38000 Grenoble, France), Takuo Wakaoka (Murata Manufacturing Co., Ltd. Kyoto, Japan), Ryo Kasai (Murata Manufacturing Co., Ltd. Kyoto, Japan), Seiji Hidaka (Murata Manufacturing Co., Ltd. Kyoto, Japan), Frédéric Voiron (Murata Integrated Passive Solutions, SAS Caen, France), Cyrille Laviron (Univ. Grenoble Alpes, CEA, LETI F-38000 Grenoble, France) and Yasser Moursy (Univ. Grenoble Alpes, CEA, LETI F-38000 Grenoble, France)

Abstract

In this paper, we present a Design-Technology Co-Optimization (DTCO) methodology of a heterogeneous 2.5D system that aims at integrating a passive interposer with HPC chiplets. The interposer comprises 3D high-density decoupling capacitors with the power delivery network (PDN) of the HPC chiplets. The proposed methodology is based on the discretization of the interposer into unit-cells and uses spatially distributed SPICE modeling to achieve voltage drop optimization, thus improving the performance of the chiplets at system level, in iterative loop processes. Using Electromagnetic (EM) simulation for unit-cells, incorporating boundary conditions that can be customized, we found out that neighboring cells play a significant role in the voltage drop seen inside the unit-cell as a result of resistive and inductive distributed parasitic interconnects. Consequently, these adjacent cells were incorporated into the EM simulation set-up for accurate power integrity analysis at system level.

Poster Papers

Poster 1 (ID: 10)

Chip Reliability Improvement by Designing Re-Distribution Layer (RDL) Pattern for Thermal Cycle in Wafer Level Packages (WLP)

Sora Park (Samsung Electronics Co., Ltd), Donggwan Shin (Samsung Electronics Co., Ltd), Jae Ho Kim (Samsung Electronics Co., Ltd), Yonghee Park (Samsung Electronics Co., Ltd) and Dae Sin Kim (Samsung Electronics Co., Ltd).

Abstract

We investigate the re-distribution layer (RDL) design effect on the V_{ref} , the output voltage of band gap reference (BGR) circuit, during the reliability test by temperature cycling (TC). The TC failure mechanism is analyzed using TCAD simulation and verified with the experimental data. We reveal that the mechanical stress of deposited polyimide between RDL films during TC can influence the device performance. The local stress caused by RDL patterns induces the mismatch between the transistors in relations of the current mirroring in BGR circuit and the V_{ref} can shifted. Therefore, for reliability of the chip performance in wafer level package (WLP), we should consider the position of the stress-sensitive circuits such as BGR when designing the RDL.

Poster 2 (ID: 16)

Neural Drift-Diffusion Model Based on Operator Learning in Fourier Space

Kyeyeop Kim (Computational Science and Engineering Team, Innovation Center, Samsung Electronics), Sanghoon Myung (Computational Science and Engineering Team, Innovation Center, Samsung Electronics), Yunji Choi (Computational Science and Engineering Team, Innovation Center, Samsung Electronics), Gijae Kang (Computational Science and Engineering Team, Innovation Center, Samsung Electronics), Kyungmi Yeom (Computational Science and Engineering Team, Innovation Center, Samsung Electronics), Songyi Han (Computational Science and Engineering Team, Innovation Center, Samsung Electronics), Jaehoon Jeong (Computational Science and Engineering Team, Innovation Center, Samsung Electronics) and Dae Sin Kim (Computational Science and Engineering Team, Innovation Center, Samsung Electronics).

Abstract

Using a microscopic picture of atomic movement we rederived the Fick's diffusion flux equation which naturally includes all types of drift terms (e.g. electrical drift, stress driven movement, and binding energy related effects). With a similar method, two phase segregation transfer rate and three phase segregation trapping/emission rates are also defined with measurable or calculable quantities.

Poster 3 (ID: 17)

Real Time TCAD Calibration via Transfer Learning

Yunji Choi (Samsung Electronics), Sanghoon Myung (Samsung Electronics), Kyeyeop Kim (Samsung Electronics), Gijae Kang (Samsung Electronics), Beomwon Jeong (Samsung Electronics), Yongwoo Jeon (Samsung Electronics), Songyi Han (Samsung Electronics), Jaehoon Jeong (Samsung Electronics) and Dae Sin Kim (Samsung Electronics)

Abstract

This study introduces a novel calibration framework of deep learning model, called Real Time TCAD (RTT) calibration. The proposed method consists of two steps: pre-training and transfer learning. In the pre-training step,

a deep learning model is trained with uncalibrated TCAD data to learn semiconductor physics. In the transfer learning step, the pre-trained model is finetuned with measurements to close the discrepancy between the model and the measurements. The proposed method can significantly reduce both calibration and data generation time while maintaining high model accuracy. In addition, our method tackles the critical problems that some of data contain missing values in practice. The results of experiments on a 28-nm logic process demonstrate the effectiveness of the proposed method.

Poster 4 (ID: 39)**Atomistic Simulations of the Impact of Rotational Twin Planes Defects on the Optical Properties of InP Systems**

Christian Dam Vedel (University of Glasgow) and Vihar Georgiev (University of Glasgow)

Abstract

Integration of III–V's materials into the current silicon platform usually yields a large number of crystal defects due to a lattice mismatch between the silicon substrate and the III–V materials. A significant amount of research has been performed to investigate how to avoid the formation of defects, such as threading dislocations or rotational twin planes (RTPs). Usually, defects in any materials constituting a device lead to a degradation of the device performance. However, if the defects can be controlled, they can potentially be beneficial for the device performance by enhancing key figures of merit, such as drive current and optical absorption. Hence, in this paper, we explore the possibility of using defects, such as RTPs, in bulk InP material to improve device characteristics, such as photo absorption.

Poster 5 (ID: 42)**Calibration Insights of Phosphorus Diffusion Model for NMOS FDSOI : Pathway to advanced technology nodes**

Anne-Sophie Royet (CEA-LETI), Rihab Chouk (CEA-LETI), Olga Cueto (CEA-LETI), Joel Kanyandekwe (CEA-LETI), Valérie Lapras (CEA-LETI), Marie-Anne Jaud (CEA-LETI), Sébastien Martinie (CEA-LETI), Tadeu Mota-Frutoso (CEA-LETI), Zdenek Chalupa (CEA-LETI), Olivier Rozeau (CEA-LETI) and Bledion Rrustemi (CEA-LETI)

Abstract

This paper evaluates the lateral dopant diffusion for source and drain junction profiles of NMOS FDSOI devices. Parameters of the phosphorus diffusion model in an in-situ doped epitaxial Source/drain are calibrated using TCAD simulations, and validated against experimental data, which vary with spike anneal temperatures, epitaxy concentrations, and gate lengths. After carefully adjusting these parameters, we incorporate them into a global simulation approach for device scaling. This enables the transition from current baseline FDSOI technology to even advanced FDSOI technology nodes.

Poster 6 (ID: 43)**Diffusion-Based Machine Learning Method for Accelerating Quantum Transport Simulations in Nanowire Transistors**

Preslav Aleksandrov (University of Glasgow), Pranav Acharya (University of Glasgow) and Vihar Georgiev (University of Glasgow)

Abstract

In this work, we have developed a new TCAD approach based on diffusion-based machine learning (ML) models that combine a latent diffusion model with our existing Non-Equilibrium Green's Function (NEGF) simulator, implemented in our in-house Nano Electronics Simulation Software (NESS). Our results demonstrate the potential of using a diffusion-based extension of the ML-NEGF methodology to substantially reduce the computational cost of device simulations without compromising the accuracy of the physical results.

Poster 7 (ID: 44)**Modeling of SOI-MOSFET with Trap-Rich Substrate for RF Circuit Design**

Soumajit Ghosh (Hiroshima University), Mitiko Miura-Mattausch (Hiroshima University), Hideyuki Kikuchihara (Hiroshima University), Takahiro Iizuka (Hiroshima University), Samir Chaudhry (Tower Semiconductor) and Yasuyuki Sahara (Tower Partners Semiconductor Co., Ltd.)

Abstract

Many efforts have been undertaken to reduce the substrate-coupling effect in RF circuits. It has been demonstrated that a trap-rich layer underneath the BOX can reduce drastically undesired harmonic distortions (HDs), thus maintaining desired signal integrity. To utilize this technology, a newly developed compact model considers the trap charge based on its physics and is implemented into HiSIM_SOI, which solves the whole potential distribution within the device iteratively. The Fermi energy modeling as a function of trap density (N_{trap}) is one of the keys for the achieved consistent modeling. It is also demonstrated that the trap charge improves the linearity of the induced potential characteristics during device operation, resulting in a HD reduction.

Poster 8 (ID: 45)**DTCO of advanced FDSOI CMOS technology by process emulation**

Aicha Boujnah (Univ. Grenoble Alpes, CEA, Leti, F-38000 Grenoble), Olga Cueto (Univ. Grenoble Alpes, CEA, Leti, F-38000 Grenoble), Marie-Anne Jaud (Univ. Grenoble Alpes, CEA, Leti, F-38000 Grenoble), Sebastien Martinie (Univ. Grenoble Alpes, CEA, Leti, F-38000 Grenoble), Franck Nallet (Synopsys Switzerland LLC, Thurgauerstrasse 40, Airgate Building, CH-8050 Zurich), Claire Fenouillet-Beranger (Univ. Grenoble Alpes, CEA, Leti, F-38000 Grenoble) and Olivier Rozeau (Univ. Grenoble Alpes, CEA, Leti, F-38000 Grenoble)

Abstract

This paper presents a methodology of DTCO (Design Technology Co-Optimization) for advanced FDSOI CMOS technology based on process emulation. By combining process emulation for the generation of 3D structures, TCAD and SPICE simulations, integrated circuit (IC) performance can be estimated. This work, based on realistic devices taking into account integration flow and interconnects topologies (multilayer dielectrics, contact etching form, etc.) offers a large range of technological and device parameters study. We illustrate the interest of this approach by specifically studying the effect of interconnect oxides permittivity on the performance of a ring oscillator (RO).

Poster 9 (ID: 53)**A Finite Element Framework for Solving the Density-Gradient Model**

Pengcong Mu (Institute of Microelectronics, Chinese Academy of Sciences), Tao Cui (Academy of Mathematics and Systems Science, Chinese Academy of Sciences), Lijun Xu (Institute of Microelectronics, Chinese Academy of Sciences), Kun Luo (Institute of Microelectronics, Chinese Academy of Sciences), Zhiqiang Li (Institute of Microelectronics, Chinese Academy of Sciences) and Zhenhua Wu (School of Physics, Zhejiang University, Institute of Microelectronics, Chinese Academy of Sciences)

Abstract

This paper presents a positive-preserving, stable finite element scheme for the density-gradient (DG) model. An efficient Newton-Krylov solver is designed to address the nonlinear coupled discrete system. Simulation results for gate-all-around (GAA) devices demonstrate the robustness and effectiveness of the proposed scheme. Notably, the simulation time using our method is only half that of the Sentaurus Device, highlighting its superior computational efficiency.

Poster 10 (ID: 54)**First Simulation of the Effects of Metal Sidewall Source/Drain and Channel Number on the Output Characteristics of Current Mirror Formed by Vertically Stacked GAA Si NS MOSFETs**

Kuan-Ju Chou (National Yang Ming Chiao Tung University) and Yiming Li (National Yang Ming Chiao Tung University)

Abstract

In this work, we study the effect of metal sidewall (MSW) source/drain (S/D) on current mirror (CM) formed by vertically stacked gate-all-around (GAA) nanosheet (NS) for the first time. Performance of CM with (w/) and without (w/o) MSW S/D is explored by using a 3D numerical device-circuit simulation. Electrostatic potential distribution in the explored CM changes significantly because of parasitic resistance. The CM w/ MSW S/D reduces the parasitic resistance and has great influence on the output characteristics depending on the CM channel number.

Poster 11 (ID: 60)**Global Field Heterograph Neural Networks for Accelerating Quantum Transport Calculation**

Xiaoxin Xie (School of Integrated Circuits, Peking University), Zhijiang Wang (School of Integrated Circuits, Peking University), Yuchen Wang (School of Integrated Circuits, Peking University) and Fei Liu (School of Integrated Circuits, Peking University)

Abstract

In this work, we propose an attention-based global field heterograph neural network (GFGNN) to characterize field effects and dynamics for the open system. Based on the heterograph abstracted from the device physics, the GFGNN has been verified to have strong predictive power on 2D MoS₂ DG-MOSFET, with MAE (mean absolute error) as low as 2.69-4.76 meV for potential profile prediction. By incorporating GFGNN into the NEGF computing framework, an acceleration of 68.18-478.57% can be achieved while maintaining the accuracy of transport property calculations by reducing or even skipping self-consistent iterations. The GFGNN-based method for transport computation extends the research paradigm of data-driven scientific discovery from the field of DFT to NEGF, which will greatly facilitate the exploration and discovery of new materials and devices in the future.

Poster 12 (ID: 64)**Automated Algorithmic Parameter Extraction of TCAD-Based SPAD SPICE Models**

Patryk Maciazek (University Of Glasgow), Isobel Nicholson (STMicroelectronics Edinburgh), Jean-Robert Manouvrier (STMicroelectronics Crolles), Denis Rideau (STMicroelectronics Crolles), Filip Kaklin (STMicroelectronics Edinburgh), Vihar Georgiev (University Of Glasgow), Elsa Lacombe (STMicroelectronics Crolles), Mohammed El-Rawhani (STMicroelectronics Edinburgh) and Christel Buj (STMicroelectronics Crolles)

Abstract

We present a methodology of automated parameter extraction for TCAD SPAD SPICE models using the Levenberg-Marquardt algorithm. The demonstrated solution has been validated on a large number of SPAD designs. These have been simulated using a well calibrated process and device simulator. This method can be applied before silicon characterisation for predictive SPICE models.

Poster 13 (ID: 79)**Wafer Edge Profile Integration with 3-D Process Emulation : Model Implementation and Utilization**

Jiyong Song (Advanced Analysis Science & Engineering Team, Samsung Electronics.), Wooyoung Cheon (Computational Science and Engineering Team, Samsung Electronics), Yukihide Tsuji (Computational Science and Engineering Team, Samsung Electronics), Yuichiro Higuchi (Process TCAD Lab., Samsung Device Solution R&D Japan), Hisashi Kotakemori (Process TCAD Lab., Samsung Device Solution R&D Japan), Shinwook Lee (Computational Science and Engineering Team, Samsung Electronics), Yasuyuki Kayama (Process TCAD Lab., Samsung Device Solution R&D Japan), Joomi Kim (Advanced Analysis Science & Engineering Team, Samsung Electronics.), Dong Ryul Lee (Advanced Analysis Science & Engineering Team, Samsung Electronics.), Sungho Lee (Advanced Analysis Science & Engineering Team, Samsung Electronics.), Jaehoon Jeong (Computational Science and Engineering Team, Samsung Electronics) and Dae Sin Kim (Computational Science and Engineering Team, Samsung Electronics)

Abstract

Attention has been focused on the front-side surface of the wafer patterning area in the process of developing new semiconductor products. But as the semiconductor process becomes more advanced, process steps increase and process schemes diversify, attention is required in the areas beyond the front-side as defects and process risks are increasing at the edges and the backside of the wafer. Currently post actions are taken for improvement of defects once they occur at the edges and backside, but through profile simulation of the wafer edge area using the 3D-emulator, we expect to discover the defect risk at an early stage of development before the defect occurs. Hence in this paper, the profile of the wafer edge was implemented using a 3D-emulator, and the consistency with the real profile was confirmed by comparing and analyzing it with the actual wafer profile.

Poster 14 (ID: 87)**An Improved Overlap Capacitance Model for LDMOS Transistors based on the BSIM-BULK Framework**

Ayushi Sharma (Indian Institute of Technology Kanpur), Ahtisham Pampori (UNIVERSITY OF CALIFORNIA BERKELEY), Mingchun Tang (Infineon Technologies AG Germany), Ravi Goel (Infineon Technologies AG Germany), Ahmed Mahmoud (Infineon Technologies AG Germany), Volker Kubrak (Infineon Technologies AG Germany), Chenming Hu (UNIVERSITY OF CALIFORNIA BERKELEY) and Yogesh Singh Chauhan (Indian Institute of Technology Kanpur)

Abstract

The gate-drain capacitance (CGD) affects the input and output impedance of transistors, necessitating designers to consider it for proper matching and interfacing with other circuit elements. For Laterally Diffused Metal-Oxide-Semiconductor (LDMOS) transistors, the drift region overlap capacitance is a key contributor to CGD. CGD gradually decreases with drain voltage (VD) and eventually saturates. However, before saturating, we observe a stepped decline in CGD at higher VD. This article provides physical insights into this step reduction of capacitance using Technology Computer-Aided Design (TCAD) simulations. Using the industry-standard BSIM-BULK model as a framework, we present an improved overlap capacitance model and validate it against measured LDMOS characteristics

Poster 15 (ID: 92)**Modeling of Trap Generation in 3-D NAND Charge Trap Flash Memory**

Anuj Kumar (Indian Institute of Technology Bombay), Ravi Tiwari (Indian Institute of Technology Bombay), Himanshu Rai (Indian Institute of Technology Bombay), Rashmi Saikia (Indian Institute of Technology Bombay), Arnav Shaurya Bisht (Indian Institute of Technology Bombay) and Souvik Mahapatra (Indian Institute of Technology Bombay)

Abstract

The Reaction-Diffusion-Drift (RDD) framework, implemented in both Sentaurus TCAD and standalone 1-D versions, is used to simulate Program/Erase (P/E) cycling related Tunnel Oxide Trap Generation (TO-TG) in Charge Trap Flash (CTF) NAND. The TCAD version uses NAND string as a device structure and bipolar bias for cycling, but is limited in the P/E cycle count due to computational time overhead. The 1-D version has an identical trap generation model as in TCAD, but it uses unipolar pulse for calibration with TCAD bipolar P/E results and extrapolate to high P/E cycle counts. The simulated TO-TG density is incorporated in the Activated Barrier Double Well Thermionic Emission (ABDWT) model to calculate post-cycling data retention (DR) loss. Experimental DR data are reproduced.

Poster 16 (ID: 93)**Predictive Simulation of Nanosheet Transistors Including the Impact of Access Resistance**

Tapas Dutta (University of Glasgow; Semiwise Ltd, Glasgow.), Fikru Adamu-Lema (University of Glasgow; Semiwise Ltd, Glasgow.), Nikolas Xeni (Semiwise Ltd, Glasgow), Ali Rezaei (University of Glasgow), Ankit Dixit (University of Glasgow), Ismail Topaloglu (Semiwise Ltd, Glasgow), Vihar Georgiev (University of Glasgow) and Asen Asenov (University of Glasgow; Semiwise Ltd, Glasgow)

Abstract

In this work we present a hierarchical computational approach to study the impact of source/drain access resistance in nanosheet transistors at the 3nm technology node and beyond. We employ the non-equilibrium Green's function (NEGF) approach to derive the current-voltage characteristics of the nanosheet transistors having extremely short source/drain extensions. Subsequently, we calibrate our quantum-corrected drift-diffusion simulator based on the density gradient formalism, which is then used to simulate structures with realistic lengths of source/drain regions. The device characteristics thus obtained reflect the impact of the access resistance. We analyse the impact of geometry scaling and doping levels in the Source/Drain extensions on the access resistance for different technology nodes.

Poster 17 (ID: 95)**Density Matrix Based Transport in Heterostructure Devices Utilizing Tight-Binding Approaches**

Mathias Pech (TU Dortmund), Alan Abdi (TU Dortmund) and Dirk Schulz (TU Dortmund)

Abstract

By combining a tight-binding solid-state description with an equation of motion for a density matrix defined at the same lattice points, an efficient and atomistic transport model emerges. Instead of mapping the density matrix onto a phase space function like the Wigner function we maintain a real space description, allowing for easy implementation of spatially varying lattice distances and hopping terms. This vastly extends the possible applications of density matrix approaches which on one hand usually require a constant discretization width to perform a Fourier transform and on the other hand usually start from a simple effective mass Hamiltonian. Our approach is applied onto GaAs/Al_xGa_{1-x}As resonant tunneling diodes and agrees well with stationary results obtained by a quantum transmitting boundary method.

The explicit time-resolved algorithm is shown to converge well and shows great computational efficiency when compared to a Quantum Liouville-type equation. Additionally, the derived equation of motion is well suited for the extension to more complex problems, especially tight binding models that take more neighbors or different orbitals into account.

Poster 18 (ID: 103)
Modeling of Advanced MRAM Devices for Sub-ns Operation

Bernhard Pruckner (Christian Doppler Laboratory for Nonvolatile Magnetoresistive Memory and Logic, TU Wien), Nils Jørstad (Christian Doppler Laboratory for Nonvolatile Magnetoresistive Memory and Logic, TU Wien), Mario Bendra (Christian Doppler Laboratory for Nonvolatile Magnetoresistive Memory and Logic, Institute for Microelectronics, TU Wien), Tomáš Hadáček (Christian Doppler Laboratory for Nonvolatile Magnetoresistive Memory and Logic, TU Wien), Siegfried Selberherr (Institute for Microelectronics, TU Wien) and Viktor Sverdlov (Christian Doppler Laboratory for Nonvolatile Magnetoresistive Memory and Logic, Institute for Microelectronics, TU Wien)

Abstract

This work explores pathways to achieve reliable sub-ns switching for Spin-Transfer Torque (STT) and Spin-Orbit Torque (SOT) MRAM devices by employing a coupled spin and charge drift-diffusion and micromagnetics simulation framework utilizing the Landau-Lifshitz-Gilbert (LLG) equation. We consider several vital mechanisms of spin current generation, such as spin current polarization in ferromagnets (FMs), the spin Hall effect (SHE) in heavy metals (HMs), the Rashba-Edelstein effect (REE) at HM/FM interfaces, the magnetic SHE (MSHE) in noncollinear anti-ferromagnets (NC-AFMs), and the anomalous Hall effect (AHE) in FMs. We employ boundary conditions based on quantum mechanical scattering from a magnetic exchange and Rashba SOC potential at the HM/FM interfaces. We also account for all critical effects in the LLG equation, such as the interfacial Dzyaloshinskii-Moriya interaction (DMI), the demagnetizing field, perpendicular magnetic anisotropy, and interlayer exchange coupling (IEC).

Poster 19 (ID: 109)
Optimization of Complementary Reconfigurable Field-Effect Transistor for Improved Circuit-Level Metrics

Juhan Ahn (The University of Texas at Austin), Saroj Satapathy (The University of Texas at Austin / Intel Corporation) and Jaydeep Kulkarni (The University of Texas at Austin).

Abstract

The Reconfigurable Field-Effect Transistor (RFET) enables dual-mode (n-type and p-type) operation in a single device, enhancing circuit design efficiency. However, silicon-based RFETs exhibit low saturation currents, limiting their use in high-performance applications. The Complementary RFET (CRFET) proposed in our previous study inspired by CFET addresses this by merging p-type and n-type RFETs in a stacked layout with dedicated interconnections for source, drain, polarity gate, and control gate. This study introduces the Enhanced CRFET (ECRFET), featuring an optimized Schottky barrier at the source/drain contacts, delivering enhanced performance with low variability at a reduced operation voltage of 0.7V.

Poster 20 (ID: 120)**Process Emulation and Device Simulation of Monolithic CFET Inverter and Transmission Gate with Split-gate Structure**

Seungwoo Jung (Gwangju Institute of Science and Technology), In Ki Kim (Gwangju Institute of Science and Technology),

Kwang-Woon Lee (Gwangju Institute of Science and Technology) and Sung-Min Hong (Gwangju Institute of Science and Technology)

Abstract

In this work, by using an in-house process emulator, the monolithic CFET technology has been considered. Two fabrication options – a conventional common-gate structure and a split-gate structure – are proposed. With the split-gate structure, a transmission gate, which is essential in realizing the standard logic cells, can be fabricated without any area penalty. Electrical performance of an inverter and a transmission gate is also simulated with an in-house device simulator. The subthreshold swings (SS) of 70.1mV/dec and 69.6mV/dec are obtained for NMOS and PMOS, respectively. The transient simulation results for a transmission gate with 1fF and 0.1fF load capacitances show: τ_{PLH} of 8.45ps and τ_{PHL} of 8.49ps at 1fF, and τ_{PLH} of 5.55ps and τ_{PHL} of 5.52ps at 0.1fF.

SISPAD 2024

International Conference on Simulation of
Semiconductor Processes and Devices

